



2015/16 PRODUCT GUIDE



With its European Headquarters in Leeds, UK, ECCO Safety Group (ESG) is a worldwide leader in commercial and emergency vehicle warning and safety products. With seven manufacturing facilities on four continents – North America, Europe, Asia and Australia, ESG markets a portfolio of the most respected brands in the industry. ESG serves more than 500 OEMs and thousands more private label, fleet and aftermarket customers in a range of industries including heavy construction, material handling, utilities and emergency services. The ECCO brand supports the commercial vehicle (amber lighting) market.

Our people are passionate about safety and since 1972 ECCO has been synonymous with design innovation, premium quality and customer service excellence. Everything we do is designed to maximise vehicle visibility and reduce accidents wherever commercial vehicles are in operation.

ESG Europe
Leeds, UK

ESG Americas
Boise, Idaho, USA

ESG Asia Pacific
Launceston, Tasmania, Australia

contents & symbol guide

Contents



Directional LEDs
pages 2-14



Beacons
pages 15-38



Minibars
pages 39-47



Lightbars
pages 48-71



Worklamps
pages 72-84



Utility Bars
pages 85-92



**Alarms and
Audible Signal Devices**
pages 94-104



Camera Systems
pages 105-115

Accessories
pages 118-124

Symbol Guide

#	C	V	A	T	J	L	W	dB(A)	F
Part Number	Colour	Volts	Amps	Type	Joules	Lumens	Watts	Decibels	Flashes per minute
Approvals	Warranty	Mounting	Beam Pattern	Monitor	Camera	Cable	Control Box	Proximity Sensors	

Certifications & Standards

Lighting

R65

Indicates compliance with European regulations specifically related to vehicle warning lights.

SAE Class (I, II & III)

Indicates compliance with the relevant section of the Society of Automotive Engineers general requirements for warning devices. Specific class rating indicates the intensity of light produced, Class I being most powerful.

General

R10

Indicates compliance with mandatory European product safety regulations specifically related to electrical products for on-road vehicles (electromagnetic compatibility).

IP

Indicates level of environmental protection provided by a product enclosure as defined by the European Committee for Electro Technical Standardization. Ingress Protection (IP) ratings are stated as two numbers, the first number relates to protection from solid materials (1-6), and the second number to protection from liquids (1-8). The higher the number, the greater the protection.

Alarms

SAE Type A, B, C, D, E & F

Indicates compliance with the relevant section of the Society of Automotive Engineers general requirements for back-up alarms and other audible warning devices. Specific type indicates the dB(A) of the alarm.



Send the right message

Directional LED warning lights let them know you're there, the ECCO logo shows them you value quality and performance.

3510 Series

Surface Mount

- # 3510A
- C Amber
- V 12-24
- A 0.75
- X 2 Bolt
- ⊗ SAE J595 Class I, R10, IP67
- ⌚ 5 Year

DIMENSIONS

37mm H x 93mm W x 12mm D

AVAILABLE COLOURS

Amber Blue Clear Green Red



Compact high intensity LED warning signal

16 flash patterns

Synchronisation capable

In-line waterproof driver module

3811 Series

Surface Mount

- # 3811A
- C Amber
- V 12-24
- A 0.4
- X 2 Bolt
- ⊗ SAE J595 Class I, R10
- ⌚ 3 Year

DIMENSIONS

53mm H x 151mm W x 30mm D

AVAILABLE COLOURS

Amber Blue Clear Red



7 flash patterns

Synchronisation capable

Encapsulated electronics extend product life

directional LEDs



Surface or bracket mount

24 flash patterns

Synchronisation capable

Encapsulated electronics extend product life

VigiLED II™

Surface / Bracket Mount

ED0001A

C Amber

V 12-24

A 0.7

X 2 Bolt / 1 Bolt Bracket

✓ SAE J595 Class I, R65, R10, IP67

⌚ 1 Year

DIMENSIONS

74mm H x 73mm W x 31mm D
(including bracket): 86mm H x 78mm W

AVAILABLE COLOURS

Amber Blue Clear Green Red



Surface or bracket mount

24 flash patterns

Synchronisation capable

Encapsulated electronics extend product life

VigiLED™

Surface / Bracket Mount

497022

C Amber

V 12-24

A 0.12

X 2 Bolt / 1 Bolt Bracket

✓ SAE J595 Class I, R65, R10, IP67

⌚ 1 Year

DIMENSIONS

74mm H x 73mm W x 31mm D
(including bracket): 86mm H x 78mm W

AVAILABLE COLOURS

Amber Blue Clear Red

directional LEDs

3715 / 3725

Surface Mount

#	3715A	3725A
C	Amber	Amber
V	12	24
A	0.3	0.2
X	2 Bolt	2 Bolt
✓	SAE J595 Class I, R10, IP67	SAE J595 Class I, R10, IP67
🕒	5 Year	5 Year

DIMENSIONS

38mm H x 130mm W x 38mm D

AVAILABLE COLOURS

Amber Blue Clear Green Red



9 flash patterns

Synchronisation capable

Encapsulated electronics extend product life

3730 / 3736

Surface Mount

#	3730A	3736A
C	Amber	Amber
T	Aluminium	ABS plastic
V	12/24	12/24
A	0.2	0.2
X	2 Bolt	2 Bolt
✓	SAE J595 Class I, R10, IP67	R10
🕒	5 Year	1 Year

DIMENSIONS

34mm H x 94mm W x 39mm D

AVAILABLE COLOURS

Amber Blue Clear Red



3730 = 14 flash patterns

3736 = 11 flash patterns

Synchronisation capable

Encapsulated electronics extend product life

directional LEDs



- Solid or split options
- Four mounting options included
- 13 flash patterns
- Synchronisation capable
- Six high-intensity LEDs provide exceptional warning



Tilt bracket / self-adhesive



Side angle

ED3706

Solid or Split Colour Multi-Mount

- # ED3706A
- C Amber
- V 12-24
- A 0.9
- X Multi-mount (surface, tilt bracket, self-adhesive, edge)
- SAE J595 Class I, R65, R10, IP67
- 3 Year

DIMENSIONS

32mm H x 132mm W x 21mm D

AVAILABLE COLOURS

Amber Blue Clear Green Red
Amber/Blue Amber/Clear Amber/Red Red/Blue



- Dual colour warning
- Separate control of each colour
- 12 high-intensity LEDs, six of each colour
- 12 flash patterns
- Synchronisation capable

ED3766

Dual Colour Surface Mount

- # ED3766AB
- C Amber/Blue
- V 12-24
- A 0.8
- X 2 Bolt
- SAE J595 Class I, R65, R10, IP67
- 3 Year

DIMENSIONS

27mm H x 162mm W x 38mm D

AVAILABLE COLOURS

Amber/Blue Amber/Clear Amber/Green
Amber/Red Red/Blue

SecuriLED

Quad Flash Surface or Bracket Mount

#	497032	497042
C	Amber	Amber
V	12/24	12/24
A	1.5	1.5
X	Surface mount	Bracket mount
⊗	R65, R10	R65, R10
⌚	3 Year	3 Year

DIMENSIONS

Surface Mount: 110mm H x 143mm W x 46mm D
Bracket Mount: 97mm H x 125mm W x 62mm D

AVAILABLE COLOURS

Amber Blue White Red



Multiple units may be connected together to provide synchronous or alternate flash patterns

Suitable for many vehicle applications

3611 / 3612

Grille / Deck / Dash / Window Mount

#	3611A	3612AA
C	Amber	Amber
T	Single	Twin
V	12-24	12-24
A	0.55	1.0
X	2 Bolt / Suction Cup	2 Bolt / Suction Cup
⊗	SAE J595 Class I, R10	SAE J595 Class I, R10
⌚	3 Year	3 Year

DIMENSIONS

Permanent Mount
3611: 53mm H x 131mm W x 74mm D
3612: 53mm H x 233mm W x 74mm D

Temporary / Window Mount
3611: 35mm H x 161mm W x 112mm D
3612: 35mm H x 263mm W x 112mm D

AVAILABLE COLOURS

Amber Blue Clear Red



14 flash patterns

Synchronisation capable

Includes temporary and permanent mounting hardware (supplied in temporary configuration, easily converts to permanent mount)

Cigarette plug adapter with on/off and flash pattern switches

Encapsulated electronics extend product life

directional LEDs



21 flash patterns
4 high intensity LEDs
Multiple heads are synchronisable

3750

Surface / Collar / Bracket Mount

3750A
C Amber
V 10-30
A 1.5
X Surface, collar, L bracket
R65, R10, IP67
2 Year

DIMENSIONS
38mm H x 38mm W x 16mm D

AVAILABLE COLOURS
Amber Blue Clear Red



Low current draw consumption
10 flash patterns
Encapsulated electronics
Six high-intensity LEDs provide exceptional warning

ED5000

Surface Mount

ED5000A
C Amber
V 12-24
A 1.5
X Surface mount
R65, R10, IP67
2 Year

DIMENSIONS
30mm H x 142mm W x 35mm D

AVAILABLE COLOURS
Amber Blue Clear Red

Stick-A-LED™ Self-Adhesive Mount

	
# ED0002A	ED0003A
C Amber	Amber
V 12-24	12-24
A 0.6	0.6
X Self-Adhesive	Self-Adhesive
⊙ R10, IP66	R10, IP66
⌚ 1 Year	1 Year


ED0004A
C Amber
V 12-24
A 0.75
X Self-Adhesive
⊙ R10, IP66
⌚ 1 Year

DIMENSIONS

ED0002: 26mm H x 60mm W x 11mm D
ED0003: 44mm H x 49mm W x 11mm D
ED0004: 41mm H x 54mm W x 11mm D

AVAILABLE COLOURS

 Amber  Blue  Clear  Red



Quad flash
Three or six LEDs
Single hole installation
Tough polycarbonate
base and lens



Self-adhesive peel and stick backing



Video

To view the Stick-A-LED™
product video, scan with any
QR code reader app

directional LEDs



Hide-A-LED™ Concealed Warning LEDs

Two, four or six LED head

Head / tail light applications

9014 = In-headlight or surface mountable

ED0010/ED0011 = Easily installs in compact and double wall light casings

16 flash patterns

Synchronisation capable

In-line waterproof driver module with 9' cable

					
# ED0010A	ED0011A	9011A	9031A	9013A	9014A
C Amber	Amber	Amber	Amber	Amber	Amber
T 2 LEDS, 3/4" shaft	2 LEDS, 2" shaft	4 LEDS, 1 head	4 LEDS, 1 head	6 LEDS, 1 head	6 LEDS, 1 head
V 12-24	12-24	12-24	12-24	12-24	2-24
A 0.5	0.5	0.35	0.35	1.25	0.9
X Self-adhesive/2 bolt	Self-adhesive/2 bolt	2 Bolt	Pop-in	2 Bolt	2 Bolt
⊗ R10, IP67	R10, IP67	R10	R10	R10	R10, IP67
⌚ 3 Year	3 Year	5 Year	5 Year	5 Year	2 Year

AVAILABLE COLOURS

 Amber  Blue  Clear  Red

DIMENSIONS

ED0010: 33mm H x 25mm Diameter

ED0011: 60mm H x 25mm Diameter

9011: 27mm H x 38mm Diameter

9031: 34mm H x 28mm Diameter

9013: 27mm H x 38mm Diameter

9014: 22mm H x 38mm Diameter



Message Master

LED Warning Sign Matrix

- New low profile design
- IP67 sealed enclosure and connections
- High brightness LED display with extra wide viewing angle
- Flexible mounting options upside-down
- Up to 99 messages

- # HD0012A
- C Amber
- V 10-30
- X Flexible mounting options
- ✓ R10
- 🕒 1 Year

AVAILABLE COLOURS

Amber Clear Red

DIMENSIONS

590mm L x 145mm W x 40mm D

Control box features

- O-LED graphic touchscreen display
- Micro-SD message storage and firmware
- PC message programme
- Adhesive tape mounting or swivel-mount option

Safety Director™



ED3300 Series

LED

Nine flash patterns

Interior or exterior mounting

Soft touch controller with flash pattern display and auxiliary switch

Includes signal bar, controller and cable

20A auxiliary relay included

#	ED3315A	ED3335A	ED3355A
C	Amber	Amber	Amber
⦿	15'	35'	55'
V	12-24	12-24	12-24
A	2.4	2.4	2.4
⚙	SAE J595 Class I, R10	SAE J595 Class I, R10	SAE J595 Class I, R10
⌚	3 Year	3 Year	3 Year

DIMENSIONS

Bar: 51mm H x 1232mm W x 76mm D

Controller: 90mm H x 149mm W x 18mm D



Cool comes standard

Looks matter – that's why every ECCO Safety Director™ includes a soft touch controller. In addition to offering convenient controls and mimicking the selected flash pattern, it also looks great mounted in your vehicle.




Safety Director™




Flash Patterns


LEFT




LEFT SOLID



RIGHT



RIGHT SOLID




CENTRE OUT



CENTRE OUT SOLID



WIG WAG



ALTERNATING QUAD FLASH



ALTERNATING SINGLE FLASH



REPLACEMENT MODULES

ED3300 Series are offered in Amber only; however, replacement colour modules are available.

ER3300A Amber module

ER3300B Blue module

ER3300C Clear module

ER3300R Red module

SYSTEM COMPONENTS

3410CB Controller

3410-15 15' Cable

3410-35 35' Cable

3410-55 55' Cable

Safety Director™

Safety 
Director™



3410

LED

Nine flash patterns

Unobtrusive interior or exterior mounting

Soft touch controller with flash pattern display and auxiliary switch

Includes signal bar, controller and cable

20A auxiliary relay included

3410A

C Amber

 15'

V 12

A 1.6

 SAE J595 Class I,
R10

 3 Year

DIMENSIONS

Bar: 48mm H x 1222mm W x 63mm D

Controller: 90mm H x 149mm W x 18mm D

SYSTEM COMPONENTS

3410CB Controller

3410LBA Signal Bar

3410-15 15' Cable

3410-35 35' Cable

3410-55 55' Cable




Video


To view the Safety Director™
product video, scan with any
QR code reader app

Flash Patterns

LEFT



LEFT SOLID




CENTRE OUT




CENTRE OUT SOLID



RIGHT



RIGHT SOLID



WIG WAG



ALTERNATING QUAD FLASH



ALTERNATING SINGLE FLASH





Beacons for any application

Choose from the latest LED technology, xenon, or traditional rotator units. A comprehensive range that includes specialist applications such as agricultural, industrial and materials handling. All tested to meet ECCO's exacting standards.

beacons



400 Series LED

- Compact design
- Maintenance free long life LED technology
- Traditional 400 Series housing
- Polycarbonate lens and ABS base
- 7 standard mounting options available



400 Series

R65 LED



V11050
C Amber
V 12/24
A 0.7
F 125 FPM
X 3 Bolt
Ø R10, R65
⌚ 3 Year

DIMENSIONS
Height: 144mm
Base: 153mm



V11052
C Amber
V 12/24
A 0.7
F 125 FPM
X 1 Bolt
Ø R10, R65
⌚ 3 Year

DIMENSIONS
Height: 147mm
Base: 153mm



V11056
C Amber
V 12/24
A 0.7
F 125 FPM
X DIN Pole Mount
Ø R10, R65
⌚ 3 Year

DIMENSIONS
Height: 204mm
Base: 153mm



V11055
C Amber
V 12/24
A 0.7
F 125 FPM
X Flexi DIN Pole
Ø R10, R65
⌚ 3 Year

DIMENSIONS
Height: 210mm
Base: 134mm



V11051
C Amber
V 12/24
A 0.7
F 125 FPM
X 1 Bolt Conical
Ø R10, R65
⌚ 3 Year

DIMENSIONS
Height: 157.4mm
Base: 131.7mm



V11053
C Amber
V 12/24
A 0.7
F 125 FPM
X Mag 50 (50mph/80kph)
Ø R10, R65
⌚ 3 Year

DIMENSIONS
Height: 151.7mm
Base: 167mm



V11054
C Amber
V 12/24
A 0.7
F 125 FPM
X Mag 70 (70mph/112kph)
Ø R10, R65
⌚ 3 Year

DIMENSIONS
Height: 153.9mm
Base: 198.5mm

400 Series

Economy LED

5L3.204
C Amber
V 12/24
A 0.4
F 62 FPM x 6
X 3 Bolt
Ø R10
⌚ 1 Year

DIMENSIONS
Height: 144mm
Base: 153mm

5L1.204
C Amber
V 12/24
A 0.4
F 62 FPM x 6
X 1 Bolt
Ø R10
⌚ 1 Year

DIMENSIONS
Height: 147mm
Base: 153mm

On request
C Amber
V 12/24
A 0.4
F 62 FPM x 6
X DIN Pole Mount
Ø R10
⌚ 1 Year

DIMENSIONS
Height: 204mm
Base: 153mm

5L4.204
C Amber
V 12/24
A 0.4
F 62 FPM x 6
X Flexi DIN Pole
Ø R10
⌚ 1 Year

DIMENSIONS
Height: 210mm
Base: 134mm

5L8.204
C Amber
V 12/24
A 0.4
F 62 FPM x 6
X 1 Bolt Conical
Ø R10
⌚ 1 Year

DIMENSIONS
Height: 157.4mm
Base: 131.7mm

5L7.204
C Amber
V 12/24
A 0.4
F 62 FPM x 6
X Mag 50 (50mph/80kph)
Ø R10
⌚ 1 Year

DIMENSIONS
Height: 151.7mm
Base: 167mm

5L0.204
C Amber
V 12/24
A 0.4
F 62 FPM x 6
X Mag 70 (70mph/112kph)
Ø R10
⌚ 1 Year

DIMENSIONS
Height: 153.9mm
Base: 198.5mm

AVAILABLE COLOURS

Amber DIN Blue Cal Blue* Green* Red*

*non ECE R65



400 Series

Xenon

Compact design

Replaceable xenon tube

Traditional 400 Series housing

Polycarbonate lens and ABS base

7 standard mounting options available

400 Series

R65 Xenon



573.200
C Amber
V 12/24
A 3.3
F 123 FPM x 2
X 3 Bolt
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 144mm
Base: 153mm



571.200
C Amber
V 12/24
A 3.3
F 123 FPM x 2
X 1 Bolt
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 147mm
Base: 153mm



572.200
C Amber
V 12/24
A 3.3
F 123 FPM x 2
X DIN Pole Mount
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 204mm
Base: 153mm



574.000
C Amber
V 12/24@12V
A 3.3
F 123 FPM x 2
X Flexi DIN Pole
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 210mm
Base: 134mm



578.200
C Amber
V 12/24
A 3.3
F 123 FPM x 2
X 1 Bolt Conical
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 157.4mm
Base: 131.7mm



577.200
C Amber
V 12/24
A 3.3
F 123 FPM x 2
X Mag 50 (50mph/80kph)
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 151.7mm
Base: 167mm



570.200
C Amber
V 12/24
A 3.3
F 123 FPM x 2
X Mag 70 (70mph/112kph)
EMC, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 153.9mm
Base: 198.5mm

AVAILABLE COLOURS

Amber DIN Blue Cal Blue* Green* Red*

*non ECE R65



400 Series

Double Flash Xenon

583.2D0 DIMENSIONS
C Amber Height: 144mm
V 12/24 Base: 153mm
A 2.1
F 80 FPM x 2
X 3 Bolt
R10
1 Year (Tube 6 months)

581.2D0 DIMENSIONS
C Amber Height: 147mm
V 12/24 Base: 153mm
A 2.1
F 80 FPM x 2
X 1 Bolt
R10
1 Year (Tube 6 months)

582.2D0 DIMENSIONS
C Amber Height: 204mm
V 12/24 Base: 153mm
A 2.1
F 80 FPM x 2
X DIN Pole Mount
R10
1 Year (Tube 6 months)

584.2D0 DIMENSIONS
C Amber Height: 210mm
V 12/24 Base: 134mm
A 2.1
F 80 FPM x 2
X Flexi DIN Pole
R10
1 Year (Tube 6 months)

588.2D0 DIMENSIONS
C Amber Height: 157.4mm
V 12/24 Base: 131.7mm
A 2.1
F 80 FPM x 2
X 1 Bolt Conical
R10
1 Year (Tube 6 months)

587.2D0 DIMENSIONS
C Amber Height: 151.7mm
V 12/24 Base: 167mm
A 2.1
F 80 FPM x 2
X Mag 50 (50mph/80kph)
R10
1 Year (Tube 6 months)

580.2D0 DIMENSIONS
C Amber Height: 153.9mm
V 12/24 Base: 198.5mm
A 2.1
F 80 FPM x 2
X Mag 70 (70mph/112kph)
R10
1 Year (Tube 6 months)

400 Series

Economy Xenon

5E3.000 DIMENSIONS
C Amber Height: 144mm
V 12/24 Base: 153mm
A 2.1
F 80 FPM
X 3 Bolt
R10
1 Year (Tube 6 months)

5E1.000 DIMENSIONS
C Amber Height: 147mm
V 12/24 Base: 153mm
A 2.1
F 80 FPM
X 1 Bolt
R10
1 Year (Tube 6 months)

5E2.000 DIMENSIONS
C Amber Height: 204mm
V 12/24 Base: 153mm
A 2.1
F 80 FPM
X DIN Pole Mount
R10
1 Year (Tube 6 months)

5E4.000 DIMENSIONS
C Amber Height: 210mm
V 12/24 Base: 134mm
A 2.1
F 80 FPM
X Flexi DIN Pole
R10
1 Year (Tube 6 months)

5E8.000 DIMENSIONS
C Amber Height: 157.4mm
V 12/24 Base: 131.7mm
A 2.1
F 80 FPM
X 1 Bolt Conical
R10
1 Year (Tube 6 months)

5E7.000 DIMENSIONS
C Amber Height: 151.7mm
V 12/24 Base: 167mm
A 2.1
F 80 FPM
X Mag 50 (50mph/80kph)
R10
1 Year (Tube 6 months)

5E0.000 DIMENSIONS
C Amber Height: 153.9mm
V 12/24 Base: 198.5mm
A 2.1
F 80 FPM
X Mag 70 (70mph/112kph)
R10
1 Year (Tube 6 months)

AVAILABLE COLOURS

 Amber  DIN Blue  Cal Blue*  Green*  Red*

*non ECE R65

beacons



400 Series

Rotating

Compact design

Belt-drive rotator mechanism

Traditional 400 Series housing

Polycarbonate lens and ABS base

7 standard mounting options available

400 Series

12/24V Rotating



403.000
C Amber
V 12/24
A 4.6/2.8
X 3 Bolt
⊗ R10, R65
⌚ 1 Year (Bulb 3 months)

DIMENSIONS
 Height: 144mm
 Base: 153mm



401.000
C Amber
V 12/24
A 4.6/2.8
X 1 Bolt
⊗ R10, R65
⌚ 1 Year (Bulb 3 months)

DIMENSIONS
 Height: 147mm
 Base: 153mm



402.000
C Amber
V 12/24
A 4.6/2.8
X DIN Pole Mount
⊗ R10, R65
⌚ 1 Year (Bulb 3 months)

DIMENSIONS
 Height: 204mm
 Base: 153mm



404.000
C Amber
V 12/24
A 4.6/2.8
X Flexi DIN Pole
⊗ R10, R65
⌚ 1 Year (Bulb 3 months)

DIMENSIONS
 Height: 210mm
 Base: 134mm



408.000
C Amber
V 12/24
A 4.6/2.8
X 1 Bolt Conical
⊗ R10, R65
⌚ 1 Year (Bulb 3 months)

DIMENSIONS
 Height: 157.4mm
 Base: 131.7mm



407.000
C Amber
V 12/24
A 4.6/2.8
X Mag 50 (50mph/80kph)
⊗ R10, R65
⌚ 1 Year (Bulb 3 months)

DIMENSIONS
 Height: 151.7mm
 Base: 167mm



400.000
C Amber
V 12/24
A 4.6/2.8
X Mag 70 (70mph/112kph)
⊗ R10, R65
⌚ 1 Year (Bulb 3 months)

DIMENSIONS
 Height: 153.9mm
 Base: 198.5mm

AVAILABLE COLOURS

Amber DIN Blue Cal Blue* Green* Red*

*non ECE R65



400 Series

12V Rotating

403.001 DIMENSIONS
C Amber Height: 144mm
V 12 Base: 153mm
A 4.6
F 185 FPM
X 3 Bolt
R10, R65
1 Year (Bulb 3 months)

401.001 DIMENSIONS
C Amber Height: 147mm
V 12 Base: 153mm
A 4.6
F 185 FPM
X 1 Bolt
R10, R65
1 Year (Bulb 3 months)

402.001 DIMENSIONS
C Amber Height: 204mm
V 12 Base: 153mm
A 4.6
F 185 FPM
X DIN Pole Mount
R10, R65
1 Year (Bulb 3 months)

404.001 DIMENSIONS
C Amber Height: 210mm
V 12 Base: 134mm
A 4.6
F 185 FPM
X Flexi DIN Pole
R10, R65
1 Year (Bulb 3 months)

408.001 DIMENSIONS
C Amber Height: 157.4mm
V 12 Base: 131.7mm
A 4.6
F 185 FPM
X 1 Bolt Conical
R10, R65
1 Year (Bulb 3 months)

407.001 DIMENSIONS
C Amber Height: 151.7mm
V 12 Base: 167mm
A 4.6
F 185 FPM
X Mag 50 (50mph/80kph)
R10, R65
1 Year (Bulb 3 months)

400.001 DIMENSIONS
C Amber Height: 153.9mm
V 12 Base: 198.5mm
A 4.6
F 185 FPM
X Mag 70 (70mph/112kph)
R10, R65
1 Year (Bulb 3 months)

400 Series

24V Rotating

403.002 DIMENSIONS
C Amber Height: 144mm
V 24 Base: 153mm
A 2.8
F 165 FPM
X 3 Bolt
R10, R65
1 Year (Bulb 3 months)

401.002 DIMENSIONS
C Amber Height: 147mm
V 24 Base: 153mm
A 2.8
F 165 FPM
X 1 Bolt
R10, R65
1 Year (Bulb 3 months)

402.002 DIMENSIONS
C Amber Height: 204mm
V 24 Base: 153mm
A 2.8
F 165 FPM
X DIN Pole Mount
R10, R65
1 Year (Bulb 3 months)

404.002 DIMENSIONS
C Amber Height: 210mm
V 24 Base: 134mm
A 2.8
F 165 FPM
X Flexi DIN Pole
R10, R65
1 Year (Bulb 3 months)

408.002 DIMENSIONS
C Amber Height: 157.4mm
V 24 Base: 131.7mm
A 2.8
F 165 FPM
X 1 Bolt Conical
R10, R65
1 Year (Bulb 3 months)

407.002 DIMENSIONS
C Amber Height: 151.7mm
V 24 Base: 167mm
A 2.8
F 165 FPM
X Mag 50 (50mph/80kph)
R10, R65
1 Year (Bulb 3 months)

400.002 DIMENSIONS
C Amber Height: 153.9mm
V 24 Base: 198.5mm
A 2.8
F 165 FPM
X Mag 70 (70mph/112kph)
R10, R65
1 Year (Bulb 3 months)

AVAILABLE COLOURS

Amber DIN Blue Cal Blue* Green* Red*
*non ECE R65

NB: 403.000, 401.000, 402.000, 404.000, 408.000, 407.000 and 400.000 are supplied without bulb. Please order 12V or 24V bulb as required.

beacons



500 Series Xenon

- Compact design
- Replaceable xenon tube
- Traditional 500 Series housing
- Polycarbonate lens and ABS base
- 7 standard mounting options available



500 Series Rotating

- Compact design
- Belt-drive rotator mechanism
- Traditional 500 Series housing
- Polycarbonate lens and ABS base
- 7 standard mounting options available

500 Series Double Flash Xenon



513.0D0
C Amber
V 12/14
A 2.1
F 80 FPM x 2
X 3 Bolt
O R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 178.5mm
Base: 153mm
Base to bolt: 11mm



511.0D0
C Amber
V 12/14
A 2.1
F 80 FPM x 2
X 1 Bolt
O R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 177mm
Base: 153mm
Base to bolt: 23.5mm



512.0D0
C Amber
V 12/14
A 2.1
F 80 FPM x 2
X DIN Pole Mount
O R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 233.6mm
Base: 153mm



514.0D0
C Amber
V 12/14
A 2.1
F 80 FPM x 2
X Flexi DIN Pole
O R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 238.5mm
Base: 133mm



518.0D0
C Amber
V 12/14
A 2.1
F 80 FPM x 2
X 1 Bolt Conical
O R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 187.5mm
Base: 131.7mm
Base to bolt: 22mm



517.0D0
C Amber
V 12/14
A 2.1
F 80 FPM x 2
X Mag 50 (50mph/80kph)
O R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 186.6mm
Base: 167mm



510.0D0
C Amber
V 12/14
A 2.1
F 80 FPM x 2
X Mag 70 (70mph/112kph)
O R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 190mm
Base: 198.5mm

AVAILABLE COLOURS

Amber DIN Blue Cal Blue* Green* Red*
*non ECE R65



500 Series

12/24V Rotating



503.000
C Amber
V 12/24
A 4.6
X 3 Bolt
R10
1 Year (Tube 6 months)



501.000
C Amber
V 12/24
A 4.6
X 1 Bolt
R10, R65
1 Year (Tube 6 months)



502.000
C Amber
V 12/24
A 4.6
X DIN Pole Mount
R10, R65
1 Year (Tube 6 months)



504.000
C Amber
V 12/24
A 4.6
X Flexi DIN Pole
R10, R65
1 Year (Tube 6 months)



508.000
C Amber
V 12/24
A 4.6
X 1 Bolt Conical
R10, R65
1 Year (Tube 6 months)



507.000
C Amber
V 12/24
A 4.6
X Mag 50 (50mph/80kph)
R10, R65
1 Year (Tube 6 months)



500.000
C Amber
V 12/24
A 4.6
X Mag 70 (70mph/112kph)
R10, R65
1 Year (Tube 6 months)

500 Series

12V Rotating

503.001

C Amber
V 12
A 4.6
F 185 FPM
X 3 Bolt
R10, R65
1 Year (Tube 6 months)

501.001

C Amber
V 12
A 4.6
F 185 FPM
X 1 Bolt
R10, R65
1 Year (Tube 6 months)

502.001

C Amber
V 12
A 4.6
F 185 FPM
X DIN Pole Mount
R10, R65
1 Year (Tube 6 months)

504.001

C Amber
V 12
A 4.6
F 185 FPM
X Flexi DIN Pole
R10, R65
1 Year (Tube 6 months)

508.001

C Amber
V 12
A 4.6
F 185 FPM
X 1 Bolt Conical
R10, R65
1 Year (Tube 6 months)

507.001

C Amber
V 12
A 4.6
F 185 FPM
X Mag 50 (50mph/80kph)
R10, R65
1 Year (Tube 6 months)

500.001

C Amber
V 12
A 4.6
F 185 FPM
X Mag 70 (70mph/112kph)
R10, R65
1 Year (Tube 6 months)

500 Series

24V Rotating

503.002

C Amber
V 24
A 2.8
F 165 FPM
X 3 Bolt
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 178.5mm
Base: 153mm

501.002

C Amber
V 24
A 2.8
F 165 FPM
X 1 Bolt
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 177mm
Base: 153mm

502.002

C Amber
V 24
A 2.8
F 165 FPM
X DIN Pole Mount
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 233.6mm
Base: 153mm

504.002

C Amber
V 24
A 2.8
F 165 FPM
X Flexi DIN Pole
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 238.5mm
Base: 133mm

508.002

C Amber
V 24
A 2.8
F 165 FPM
X 1 Bolt Conical
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 187.5mm
Base: 131.7mm

507.002

C Amber
V 24
A 2.8
F 165 FPM
X Mag 50 (50mph/80kph)
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 186.6mm
Base: 167mm

500.002

C Amber
V 24
A 2.8
F 165 FPM
X Mag 70 (70mph/112kph)
R10, R65
1 Year (Tube 6 months)

DIMENSIONS
Height: 190mm
Base: 198.5mm

AVAILABLE COLOURS

Amber DIN Blue Cal Blue* Green* Red*
*non ECE R65

NB: 503.000, 501.000, 502.000, 504.000, 508.000, 507.000 and 500.000 are supplied without bulb. Please order 12V or 24V bulb as required.

beacons

Static Flash

Special Purpose

Recommended for airport use

Conforms to CAP168 and ICAO regulations

Supplied with incandescent bulb or new state-of-the-art LED.







400 Series

12/24V LED

	# V11050.168 C Amber V 12/24 A 0.7 F 60 FPM X 3 Bolt Ø R10 ⌚ 3 Year
	# V11052.168 C Amber V 12/24 A 0.7 F 60 FPM X 1 Bolt Ø R10 ⌚ 3 Year
	# V11055.168 C Amber V 12/24 A 0.7 F 60 FPM X Flexi DIN Pole Ø R10 ⌚ 3 Year
	# V11054.168 C Amber V 12/24 A 0.7 F 60 FPM X Mag 70 Ø R10 ⌚ 3 Year





400 Series

12V Incandescent

	# 5C3.201 C Amber V 12 A 2.1 F 84 FPM X 3 Bolt Ø R10 ⌚ 1 Year
	# 5C1.201 C Amber V 12 A 2.1 F 84 FPM X 1 Bolt Ø R10 ⌚ 1 Year
	# 5C4.201 C Amber V 12 A 2.1 F 84 FPM X Flexi DIN Pole Ø R10 ⌚ 1 Year
	# 5C0.201 C Amber V 12 A 2.1 F 84 FPM X Mag 70 Ø R10 ⌚ 1 Year

400 Series

24V Incandescent

	# 5C3.202 C Amber V 24 A 1.0 F 84 FPM X 3 Bolt Ø R10 ⌚ 1 Year
	# 5C1.202 C Amber V 24 A 1.0 F 84 FPM X 1 Bolt Ø R10 ⌚ 1 Year
	# 5C4.202 C Amber V 24 A 1.0 F 84 FPM X Flexi DIN Pole Ø R10 ⌚ 1 Year
	# 5C0.202 C Amber V 24 A 1.0 F 84 FPM X Mag 70 Ø R10 ⌚ 1 Year

DIMENSIONS
Height: 144mm
Base: 153mm

DIMENSIONS
Height: 147mm
Base: 153mm

DIMENSIONS
Height: 210mm
Base: 134mm

DIMENSIONS
Height: 153.9mm
Base: 198.5mm



500 Series

12V Incandescent



523.001
C Amber
V 12
A 2.1
F 84 FPM
X 3 Bolt
Ø R10
⌚ 1 Year



521.001
C Amber
V 12
A 2.1
F 84 FPM
X 1 Bolt
Ø R10
⌚ 1 Year



524.001
C Amber
V 12
A 2.1
F 84 FPM
X Flexi DIN Pole
Ø R10
⌚ 1 Year



520.001
C Amber
V 12
A 2.1
F 84 FPM
X Mag 70
Ø R10
⌚ 1 Year

500 Series

24V Incandescent

523.002
C Amber
V 24
A 1.0
F 84 FPM
X 3 Bolt
Ø R10
⌚ 1 Year

DIMENSIONS
Height: 178.5mm
Base: 153mm

521.002
C Amber
V 24
A 1.0
F 84 FPM
X 1 Bolt
Ø R10
⌚ 1 Year

DIMENSIONS
Height: 177mm
Base: 153mm

524.002
C Amber
V 24
A 1.0
F 84 FPM
X Flexi DIN Pole
Ø R10
⌚ 1 Year

DIMENSIONS
Height: 238.5mm
Base: 133mm

520.002
C Amber
V 24
A 1.0
F 84 FPM
X Mag 70
Ø R10
⌚ 1 Year

DIMENSIONS
Height: 190mm
Base: 198.5mm

beacons



Delta Series

LED / Xenon

Compact design

Polycarbonate lens and ABS base

4 standard mounting options available

Maintenance-free long life LED technology (Delta LED only)

15 Watt bulb (Delta Xenon only)



Delta LED

15 Flash Patterns



DB5001A
C Amber
V 12/24
A 1.4
F 125 FPM x 2
X 3 Bolt
⊗ R10, R65
⌚ 2 Year

DIMENSIONS
Height: 118mm
Base: 148mm



DB5002A
C Amber
V 12/24
A 1.4
F 125 FPM x 2
X 1 Bolt
⊗ R10, R65
⌚ 2 Year

DIMENSIONS
Height: 141.4mm
Base: 148mm



DB5003A
C Amber
V 12/24
A 1.4
F 125 FPM x 2
X DIN Pole Mount
⊗ R10, R65
⌚ 2 Year

DIMENSIONS
Height: 179mm
Base: 148mm



DB5004A
C Amber
V 12/24
A 1.4
F 125 FPM x 2
X Magnetic
⊗ R10, R65
⌚ 2 Year

DIMENSIONS
Height: 141.4mm
Base: 148mm

Delta Xenon

Single Flash

470002

C Amber
V 12/24
A 1.5
F 120 FPM x 2
X 3 Bolt
⊗ R10
⌚ 1 Year

DIMENSIONS
Height: 118mm
Base: 148mm

470012

C Amber
V 12/24
A 1.5
F 120 FPM x 2
X 1 Bolt
⊗ R10
⌚ 1 Year

DIMENSIONS
Height: 141.4mm
Base: 148mm

470032

C Amber
V 12/24
A 1.5
F 120 FPM x 2
X DIN Pole Mount
⊗ R10
⌚ 1 Year

DIMENSIONS
Height: 179mm
Base: 148mm

470017

C Amber
V 12/24
A 1.5
F 120 FPM x 2
X Magnetic
⊗ R10
⌚ 1 Year

DIMENSIONS
Height: 141.4mm
Base: 148mm

AVAILABLE COLOURS

Amber DIN Blue Green Red



LP Series

Low Profile

LED

- Mini compact design
- Polycarbonate lens and ABS base
- Reduced output 'steady burn' function
- Synchronous flash capability
- Maintenance-free long life LED technology



- # 30000260
- C Amber
- V 12/24
- A 0.4
- F 62 FPM x 6
- X 2 Bolt
- ⊗ R10, IP67
- ⌚ 3 Year

DIMENSIONS
Height: 56.6mm
Base: 81mm

Xenon

- Mini compact design
- Polycarbonate lens and ABS base
- Synchronous flash capability
- 5 watt tube



- # 30115270
- C Amber
- V 12/24
- A 0.4
- F 75 FPM
- X 2 Bolt
- ⊗ R10, IP67
- ⌚ 1 Year

DIMENSIONS
Height: 56.6mm
Base: 81mm

AVAILABLE COLOURS

Amber Blue Clear Green Red



LT Series

Low Profile

LED

Mini compact design

Polycarbonate lens and ABS base

Reduced output 'steady burn' function

Synchronous flash capability

Maintenance-free long life LED technology



31000260

C Amber
V 12/24
A 0.4
F 62 FPM x 6
X 2 Bolt
⊗ R10, IP67
⌚ 3 Year

DIMENSIONS
Height: 102mm
Base: 81mm

Xenon

Mini compact design

Polycarbonate lens and ABS base

Synchronous flash capability

5 watt tube



31115270

C Amber
V 12/24
A 0.4
F 75 FPM
X 2 Bolt
⊗ R10, IP67
⌚ 1 Year

DIMENSIONS
Height: 102mm
Base: 81mm

AVAILABLE COLOURS

Amber Blue Clear Green Red

beacons

7660 Series LED Hybrid

Hybrid LED / rotating warning signal

No gears, brushes or bulbs to wear out

LED optics produce intense rotating beam

UV hard coated lens reduces abrasion, cracking and fading

Aluminium base



- # **7660A**
C Amber
V 12-24
A 2.1
F 125 FPM
X 3 Bolt
✓ SAE J845 Class I,
 R10, IP67
⌚ 5 Year



- # **7660A-VM**
C Amber
V 12-24
A 2.1
F 125 FPM
X Magnetic
✓ SAE J845 Class I,
 R10, IP67
⌚ 5 Year

DIMENSIONS
 Height: 156mm
 Base: 160mm



- # **7660CA**
C Illuminates Amber
V 12-24
A 125 FPM
F 2.3
X 3 Bolt
✓ SAE J845 Class I,
 R10, IP67
⌚ 5 Year



- # **7660CA-VM**
C Illuminates Amber
V 12-24
A 2.3
F 125 FPM
X Magnetic
✓ SAE J845 Class I,
 R10, IP67
⌚ 5 Year

DIMENSIONS
 Height: 156mm
 Base: 160mm

AVAILABLE COLOURS

Amber Blue Clear Green Red

CA models =
 clear lens / amber illumination



7900 Series LED

Aluminium base (Class I only)

Reinforced polypropylene base (Class II only)

SAE Class II LED



- # **7945A**
- C** Amber
- V** 12-48
- A** 1.3
- X** 3 Bolt
- ✓** SAE J845 Class II
- ⌚** 2 Year



- # **7945A-VM**
- C** Amber
- V** 12-48
- A** 1.3
- X** Magnetic
- ✓** SAE J845 Class II
- ⌚** 2 Year



- # **7950A**
- C** Amber
- V** 12-48
- A** 1.3
- X** 3 Bolt
- ✓** SAE J845 Class II
- ⌚** 2 Year



- # **7950A-VM**
- C** Amber
- V** 12-48
- A** 1.3
- X** Magnetic
- ✓** SAE J845 Class II
- ⌚** 2 Year

SAE Class I LED



- # **7965A**
- C** Amber
- V** 12-24
- A** 3.6
- X** 3 Bolt
- ✓** SAE J845 Class I
- ⌚** 2 Year

DIMENSIONS
Height: 124mm
Base dia. 165mm



- # **7965A-VM**
- C** Amber
- V** 12-24
- A** 3.6
- X** Magnetic
- ✓** SAE J845 Class I
- ⌚** 2 Year

DIMENSIONS
Height: 124mm
Base dia. 165mm



- # **7970A**
- C** Amber
- V** 12-24
- A** 3.6
- X** 3 Bolt
- ✓** SAE J845 Class I
- ⌚** 2 Year

DIMENSIONS
Height: 170mm
Base dia. 165mm



- # **7970A-VM**
- C** Amber
- V** 12-24
- A** 3.6
- X** Magnetic
- ✓** SAE J845 Class I
- ⌚** 2 Year

DIMENSIONS
Height: 170mm
Base dia. 165mm

beacons

6200 Series

LED / Xenon

Industrial applications

Pulse8 (8 flashes per cycle) flash pattern (LED only)

Encapsulated electronics

Reinforced nylon base

Ideal for material handling equipment

LED



6262A
C Amber
V 12-80
A 0.47
F 70 FPM
X 2 Bolt
Ø R10
⌚ 3 Year

DIMENSIONS
Height: 138mm
Base dia. 63mm

Xenon



6220A
C Amber
V 12-80
A 0.6
F 85 FPM
X 2 Bolt
Ø R10
⌚ 2 Year (Tube 6 months)

DIMENSIONS
Height: 138mm
Base dia. 63mm

6400 Series

LED / Xenon

Industrial applications

Pulse8 (8 flashes per cycle) LED only

Reinforced nylon base

Ideal for material handling equipment

LED



6465A
C Amber
V 12-80
A 1.9
F 85 FPM
X 3 Bolt
Ø R10
⌚ 3 Year

DIMENSIONS
Height: 94mm
Base dia. 129mm

Xenon



6410A
C Amber
V 12-80
A 0.3
F 70 FPM
X 3 Bolt
Ø R10
⌚ 2 Year (Tube 6 months)

DIMENSIONS
Height: 94mm
Base dia. 129mm

AVAILABLE COLOURS

Amber Blue Clear Green Red



Industrious attitude

Smaller vehicles don't have lower standards, choose one of our 6262 or 6465 Series LED beacons when you need versatile, compact warning lights just like the big boys. An excellent choice for high vibration, material handling and industrial applications.



Premium Series LED

Compact design

Maintenance free long life LED technology

4 standard mounting options



V11037
C Amber
V 12/24
A 0.9
F 125 FPM
X 1 Bolt
⊗ R65, R10
⌚ 2 Year

DIMENSIONS
Height: 134mm
Base: 131mm



V11038
C Amber
V 12/24
A 0.9
F 125 FPM
X 3 Bolt
⊗ R65, R10
⌚ 2 Year

DIMENSIONS
Height: 124mm
Base: 153mm



V11039
C Amber
V 12/24
A 0.9
F 125 FPM
X Magnetic
⊗ R65, R10
⌚ 2 Year

DIMENSIONS
Height: 132mm
Base: 167mm



V11040
C Amber
V 12/24
A 0.9
F 125 FPM
X Flexi LED
⊗ R65, R10
⌚ 2 Year

DIMENSIONS
Height: 186mm
Base: 134mm



V11068
C Amber
V 12/24
A 0.9
F 125 FPM
X 3 Bolt
⊗ R65, R10
⌚ 2 Year

DIMENSIONS
Height: 124mm
Base: 153mm

beacons



Husky Series

LED

Compact design

Polycarbonate lens and ABS base

Six flash burst pattern

Maintenance-free long life LED technology



469087
C Amber
V 12-80
A 0.4@12Vdc
F 62 FPM x 6
X 3 Bolt
⊗ R10
⌚ 1 Year

DIMENSIONS
 Height: 118mm
 Base: 148mm



469088
C Amber
V 12-80
A 0.4@12Vdc
F 62 FPM x 6
X Magnetic
⊗ R10
⌚ 2 Year

DIMENSIONS
 Height: 141.4mm
 Base: 148mm

Husky Series

Xenon

Compact design

Polycarbonate lens and ABS base

5 Watt tube



469012
C Amber
V 12-80
A 0.4@12Vdc
F 75 FPM
X 3 Bolt
⊗ R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
 Height: 118mm
 Base: 148mm



Alpha Series

Xenon

Single flash

2 Watt tube

4 standard mounting options available



420012 **DIMENSIONS**
Height: 118mm
Base: 148mm
C Amber
V 12/24
A 0.4@12Vdc
F 75 FPM
X 3 Bolt
⊗ R10
⌚ 1 Year (Tube 6 months)



420022 **DIMENSIONS**
Height: 141.4mm
Base: 148mm
C Amber
V 12/24
A 0.4@12Vdc
F 75 FPM
X 1 Bolt
⊗ R10
⌚ 1 Year (Tube 6 months)



420002 **DIMENSIONS**
Height: 179mm
Base: 148mm
C Amber
V 12/24
A 0.4@12Vdc
F 75 FPM
X DIN Pole
⊗ R10
⌚ 1 Year (Tube 6 months)



420042 **DIMENSIONS**
Height: 141.4mm
Base: 148mm
C Amber
V 12/24
A 0.4@12Vdc
F 75 FPM
X Magnetic
⊗ R10
⌚ 1 Year (Tube 6 months)

Beta Series

Xenon

Single flash

6 Watt tube

4 standard mounting options available



468012 **DIMENSIONS**
Height: 118mm
Base: 148mm
C Amber
V 12/24
A 0.4@12Vdc
F 75 FPM
X 3 Bolt
⊗ R10
⌚ 1 Year (Tube 6 months)



468082 **DIMENSIONS**
Height: 141.4mm
Base: 148mm
C Amber
V 12/24
A 0.4@12Vdc
F 75 FPM
X 1 Bolt
⊗ R10
⌚ 1 Year (Tube 6 months)



468002 **DIMENSIONS**
Height: 179mm
Base: 148mm
C Amber
V 12/24
A 0.4@12Vdc
F 75 FPM
X DIN Pole
⊗ R10
⌚ 1 Year (Tube 6 months)



468022 **DIMENSIONS**
Height: 141.4mm
Base: 148mm
C Amber
V 12/24
A 0.4@12Vdc
F 75 FPM
X Magnetic
⊗ R10
⌚ 1 Year (Tube 6 months)

AVAILABLE COLOURS

Amber Blue Clear Green Red

beacons

Lunar Series

Xenon

15 Watt tube

5 standard mounting options available

4 individual units can be synchronised together



493002
C Amber
V 12/24
A 1.5@12Vdc
F 120FPM x 2
X 3 Bolt
⌚ R10, R65
⌚ 1 Year (Tube 6 months)



493012
C Amber
V 12/24
A 1.5@12Vdc
F 120FPM x 2
X 1 Bolt
⌚ R10, R65
⌚ 1 Year (Tube 6 months)

DIMENSIONS
 Height: 145mm
 Base: 150mm



493032
C Amber
V 12/24
A 1.5@12Vdc
F 120FPM x 2
X DIN Pole
⌚ R10, R65
⌚ 1 Year (Tube 6 months)



493042
C Amber
V 12/24
A 1.5@12Vdc
F 120FPM x 2
X Flexi DIN Pole
⌚ R10, R65
⌚ 1 Year (Tube 6 months)

DIMENSIONS
 Height: 145mm
 Base: 150mm



493022
C Amber
V 12/24
A 1.5@12Vdc
F 120FPM x 2
X Magnetic
⌚ R10, R65
⌚ 1 Year (Tube 6 months)

Solar Series

Xenon

15 Watt tube

3 standard mounting options available

4 individual units can be synchronised together



470090
C Amber
V 12/24
A 1.5@12Vdc
F 120FPM x 2
X 3 Bolt
⌚ R10, R65
⌚ 1 Year (Tube 6 months)



470094
C Amber
V 12/24
A 1.5@12Vdc
F 120FPM x 2
X DIN Pole
⌚ R10, R65
⌚ 1 Year (Tube 6 months)

DIMENSIONS
 Height: 170mm
 Base: 160mm



470092
C Amber
V 12/24
A 1.5@12Vdc
F 120FPM x 2
X Magnetic
⌚ R10, R65
⌚ 1 Year (Tube 6 months)

DIMENSIONS
 Height: 170mm
 Base: 160mm

AVAILABLE COLOURS

Amber Blue



Turbo Series

Xenon

15 Watt tube

3 standard mounting options available

4 individual units can be synchronised together



470042
C Amber
V 12/24
A 1.5@12Vdc
F 120FPM x 2
X 3 Bolt
⌚ R10, R65
⌚ 1 Year (Tube 6 months)



470047
C Amber
V 12/24
A 1.5@12Vdc
F 120FPM x 2
X DIN Pole
⌚ R10, R65
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 175mm
Base: 160mm



470045
C Amber
V 12/24
A 1.5@12Vdc
F 120FPM x 2
X Magnetic
⌚ R10, R65
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 175mm
Base: 160mm

AVAILABLE COLOURS

Amber Blue

Husky Pup Series

Xenon

2 Watt tube

Compact design

3 standard mounting options available



469040
C Amber
V 12-80
A 0.4@12Vdc
F 75FPM x 2
X 3 Bolt
⌚ R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 118mm
Base: 148mm



469082
C Amber
V 12-80
A 0.4@12Vdc
F 75FPM x 2
X DIN Pole
⌚ R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 179mm
Base: 148mm



469086
C Amber
V 12-80
A 0.4@12Vdc
F 75FPM x 2
X Magnetic
⌚ R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
Height: 141.4mm
Base: 148mm

AVAILABLE COLOURS

Amber Blue Clear Green Red

beacons

Durastrobe

Xenon

5 Watt tube

Flexible pole mount base

Suitable for construction plant, contracting, agricultural vehicles



466002
C Amber
V 12/24
A 0.4@12Vdc
F 75 FPM
X Flexi DIN Pole
Ø R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
 Height: 168.2mm
 Base: 112mm

Compact Series

Rotating

23 Watt (21 Watt bulb 2 Watt motor)

Low profile

Agricultural applications



307.000
C Amber
V 12
A 1.9@12Vdc
F 150 FPM
X 3 Bolt
Ø R10, R65
⌚ 1 Year (Bulb 3 months)

DIMENSIONS
 Height: 90mm
 Base: 120mm

Gamma

Xenon

6 Watt tube

Flexible single bolt base

Suitable for fleet, road maintenance, agriculture, construction, plant, utilities, large vehicles and refuse trucks.



468092
C Amber
V 12/24
A 0.4@12Vdc
F 75 FPM
X Single Bolt
Ø R10
⌚ 1 Year (Tube 6 months)

DIMENSIONS
 Height: 145mm
 Base: 112mm



309.000
C Amber
V 12
A 1.9@12Vdc
F 150 FPM
X Flexi DIN Pole
Ø R10, R65
⌚ 1 Year (Bulb 3 months)

DIMENSIONS
 Height: 90mm
 Base: 120mm

310.000
C Amber
V 12
A 1.9@12Vdc
F 150 FPM
X Magnetic
Ø R10, R65
⌚ 1 Year (Bulb 3 months)

DIMENSIONS
 Height: 90mm
 Base: 120mm



Agricultural

Xenon

Bulb options

55W H1 (12Vdc) 70W H1 (24Vdc)

Suitable for agricultural use



304.000
C Amber
V 12/24
A 4.6@12Vdc
F 150 FPM
X Flexi DIN
Ø R10, R65
⌚ 1 Year

DIMENSIONS
 Height: 204mm
 Base: 130mm

The logo features the word "REFLEX" in a bold, sans-serif font, with a stylized 'X' that has a horizontal bar through its center, all enclosed within a rectangular border.


REFLEX



Small but perfectly formed

Compact, robust and reliable and with fabulous light output. ECCO's range of minibars includes the latest Reflex LED bars and Blaze and Blaze 2, available with xenon or rotator units. Choose from 1 bolt, 2 bolt or the flexibility of magnetic mount. Cost-effective alternatives to individual beacons.

minibars LED

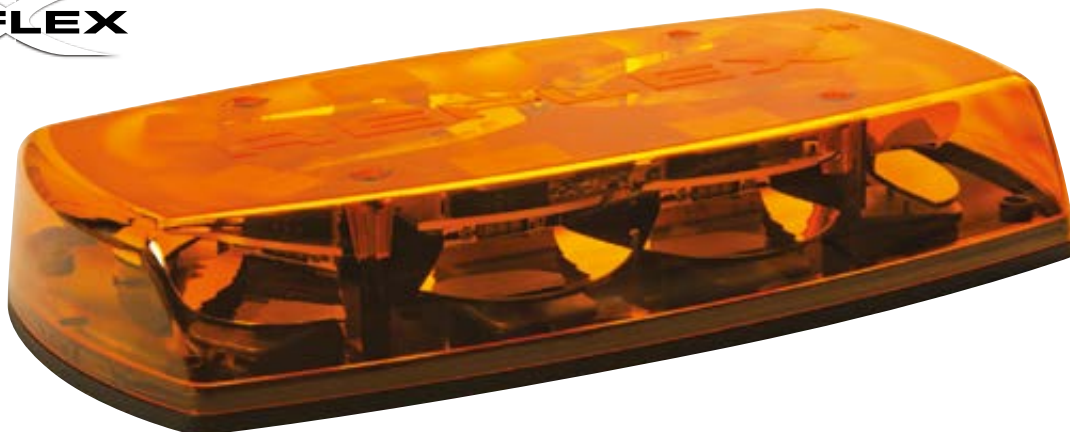


5565 Series

R65 LED

Reflective LED modules


Quad Flash

Cigarette plug with on/off and flash pattern selection switch
(vacuum - magnet only)




5565A-VA1

- C** Amber
- V** 12-24
- A** 2.7
- F** 120 FPM x 4
- X** 1 Bolt
- ⊗** R10, IP65
- ⌚** 3 Year




5565CA-VA1

- Illuminates Amber
- 12-24
- 2.7
- 120 FPM x 4
- 1 Bolt
- R10, IP65
- 3 Year




5565A-VA2

- Amber
- 12-24
- 2.7
- 120 FPM x 4
- 2 Bolt
- R10, IP65
- 3 Year




5565CA-VA2

- Illuminates Amber
- 12-24
- 2.7
- 120 FPM x 4
- 2 Bolt
- R10, IP65
- 3 Year



5565A-VAMAG

- C** Amber
- V** 12-24
- A** 2.7
- F** 120 FPM x 4
- X** Vacuum-magnet
- ⊗** R10, IP65
- ⌚** 3 Year



5565CA-VAMAG


- Illuminates Amber
- 12-24
- 2.7
- 120 FPM x 4
- Vacuum-magnet
- R10, IP65
- 3 Year

AVAILABLE COLOURS

Amber

DIMENSIONS

63mm H x 381mm W x 229mm D
(79mm H including vacuum-magnet)

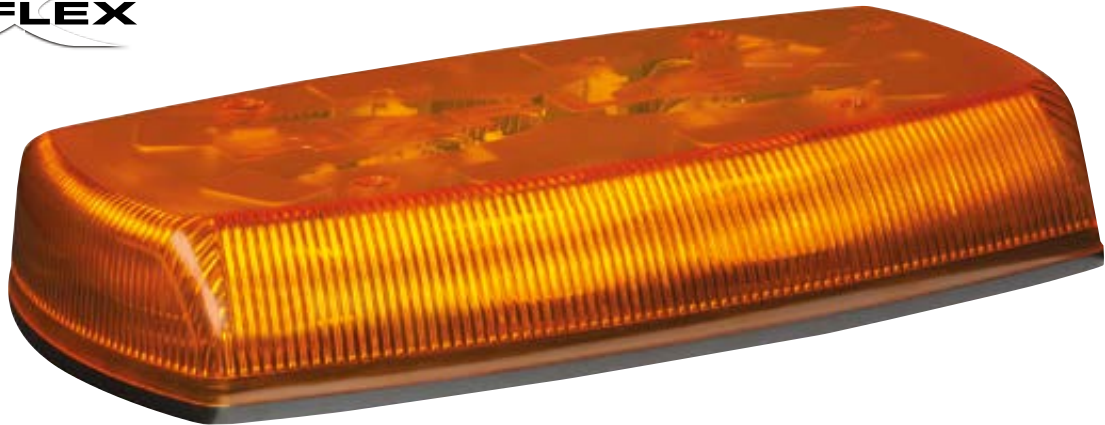


5580 Series

LED SAE Class II


Reflective LED modules

18 flash patterns


Cigarette plug with on/off and flash pattern selection switch
(vacuum - magnet only)




- # 5580A-VA1
- C Amber
- V 12-24
- A 2.7
- X 1 Bolt
- ✓ SAE J845 Class II, R10, IP65
- ⌚ 3 Year




- 5580CA-VA1
- Illuminates Amber
- 12-24
- 2.7
- 1 Bolt
- SAE J845 Class II, R10, IP65
- 3 Year




- 5580A-VA2
- Amber
- 12-24
- 2.7
- 2 Bolt
- SAE J845 Class II, R10, IP65
- 3 Year



- 5580CA-VA2
- Illuminates Amber
- 12-24
- 2.7
- 2 Bolt
- SAE J845 Class II, R10, IP65
- 3 Year



- # 5580A-VAMAG
- C Amber
- V 12-24
- A 2.7
- X Vacuum-magnet
- ✓ SAE J845 Class II, R10, IP65
- ⌚ 3 Year



- 5580CA-VAMAG
- Illuminates Amber
- 12-24
- 2.7
- Vacuum-magnet
- SAE J845 Class II, R10, IP65
- 3 Year

AVAILABLE COLOURS

Amber

DIMENSIONS

63mm H x 381mm W x 229mm D
(79mm H including vacuum-magnet)


minibars LED




Blaze Series

R65 LED


- Traditional Blaze housing
- 12 LEDs arranged to produce a 360° flash pattern
- Polycarbonate moulded base and lens
- Three mounting options available



70-00511-V
C Amber
V 12-24
A 3.0
F 125 FPM x 2
X 2 Bolt
R10, R65
1 Year



70-00514-V
Amber
12-24
3.0
125 FPM x 2
1 Bolt
R10, R65
1 Year



70-00512-V
Amber
12-24
3.0
125 FPM x 2
Magnetic
R10, R65
1 Year

AVAILABLE COLOURS
Amber Blue

DIMENSIONS
145mm H x 210mm W x 400mm D
(165mm H including vacuum-magnet)



Blaze II Series

Economy LED

- Traditional Blaze II housing
- Low profile aerodynamic styling
- Polycarbonate moulded base and lens
- Three mounting options available



65.00202
C Amber
V 12-24
A 0.4
F 65 FPM x 6
X 2 Bolt
R10
1 Year



60.00203
Amber
12-24
0.4
65 FPM x 6
1 Bolt
R10
1 Year



65.00204
Amber
12-24
0.4
65 FPM x 6
Magnetic
R10
1 Year

AVAILABLE COLOURS
 Amber  Blue

DIMENSIONS
113mm H x 210mm W x 400mm D
(165mm H including vacuum-magnet)

minibars Xenon

Blaze Series Xenon



711.000
C Amber
V 12-24
A 2.3
F 80 FPM x 2
X 2 Bolt
Ø R10
⌚ 1 Year (Tube 6 months)



741.000
Amber
12-24
2.3
60 FPM x 4
2 Bolt
R10
1 Year (Tube 6 months)



7F1.000
Amber
12-24
2.3
80 FPM x 2
2 Bolt
R10, R65
1 Year (Tube 6 months)



711.000.Y
C Amber
V 12-24
A 2.3
F 80 FPM x 2
X 1 Bolt
Ø R10
⌚ 1 Year (Tube 6 months)



741.000.Y
Amber
12-24
2.3
60 FPM x 4
1 Bolt
R10
1 Year (Tube 6 months)



7F1.000.Y
Amber
12-24
2.3
80 FPM x 2
1 Bolt
R10, R65
1 Year (Tube 6 months)



711.000.BAA
C Amber
V 12-24
A 2.3
F 80 FPM x 2
X Magnetic
Ø R10
⌚ 1 Year (Tube 6 months)



741.000.BAA
Amber
12-24
2.3
60 FPM x 4
Magnetic
R10
1 Year (Tube 6 months)



7F1.000.BAA
Amber
12-24
2.3
80 FPM x 2
Magnetic
R10, R65
1 Year (Tube 6 months)

AVAILABLE COLOURS
Amber Blue Red

DIMENSIONS
145mm H x 210mm W x 400mm D
(165mm H including vacuum-magnet)



Blaze II Series

Xenon



611.AA00
C Amber
V 12-24
A 2.3
F 80 FPM x 2
X 2 Bolt
⊙ R10
⌚ 1 Year (Tube 6 months)



641.AA00
C Amber
V 12-24
A 2.3
F 60 FPM x 4
X 2 Bolt
⊙ R10
⌚ 1 Year (Tube 6 months)



611.AA00.Y
C Amber
V 12-24
A 2.3
F 80 FPM x 2
X 1 Bolt
⊙ R10
⌚ 1 Year (Tube 6 months)



641.AA00.Y
C Amber
V 12-24
A 2.3
F 60 FPM x 4
X 1 Bolt
⊙ R10
⌚ 1 Year (Tube 6 months)



611.AA00.MAAA
C Amber
V 12-24
A 2.3
F 80 FPM x 2
X Magnetic
⊙ R10
⌚ 1 Year (Tube 6 months)



641.AA00.M
C Amber
V 12-24
A 2.3
F 60 FPM x 4
X Magnetic
⊙ R10
⌚ 1 Year (Tube 6 months)

AVAILABLE COLOURS

 Amber  Blue  Red

DIMENSIONS

113mm H x 210mm W x 400mm D
(165mm H including vacuum-magnet)

minibars Rotating

Blaze Series Rotating



701.001
C Amber
V 12
A 9.2
F 190 FPM
X 2 Bolt
R10, R65
1 Year (Bulb 3 months)



701.002
Amber
24
6.0
190 FPM
2 Bolt
R10, R65
1 Year (Bulb 3 months)



701.001.Y
Amber
12
9.2
190 FPM
1 Bolt
R10, R65
1 Year (Bulb 3 months)



701.002.Y
Amber
24
6.0
190 FPM
1 Bolt
R10, R65
1 Year (Bulb 3 months)



701.001.BAA
C Amber
V 12
A 9.2
F 190 FPM
X Magnetic
R10, R65
1 Year (Bulb 3 months)



701.002.BAA
Amber
24
6.0
190 FPM
Magnetic
R10, R65
1 Year (Bulb 3 months)

AVAILABLE COLOURS
Amber Blue Red

DIMENSIONS
145mm H x 210mm W x 400mm D
(165mm H including vacuum-magnet)

Blaze Series

Rotating



601.AA01
C Amber
V 12
A 9.2
F 190 FPM
X 2 Bolt
☑ R10, R65
🕒 1 Year (Bulb 3 months)



601.AA02
 Amber
 24
 6.0
 190 FPM
 2 Bolt
 R10, R65
 1 Year (Bulb 3 months)



601.AA01.Y
 Amber
 12
 9.2
 190 FPM
 1 Bolt
 R10, R65
 1 Year (Bulb 3 months)



701.AA02.Y
 Amber
 24
 6.0
 190 FPM
 1 Bolt
 R10, R65
 1 Year (Bulb 3 months)



601.AA01.M
C Amber
V 12
A 9.2
F 190 FPM
X Magnetic
☑ R10, R65
🕒 1 Year (Bulb 3 months)



601.AA02.M
 Amber
 24
 6.0
 190 FPM
 Magnetic
 R10, R65
 1 Year (Bulb 3 months)

AVAILABLE COLOURS

 Amber  Blue  Red

DIMENSIONS

113mm H x 210mm W x 400mm D
 (165mm H including vacuum-magnet)



Value that's easy to see.



Choose the brightest and the best

One of the most comprehensive ranges of lightbars on the market. With lengths available from 590mm to 1890mm and a choice of LED, xenon and rotating units. A vast range of options too including worklamps, alley lamps and stop/tail/indicator units to name a few. Bespoke designs are available on request.



To view the Vantage Lightbar™
product video, scan with any
QR code reader app
or visit [YouTube.com/ECCOSafety](https://www.youtube.com/ECCOSafety)



Video

To view the Vantage Lightbar™
flash pattern video, scan with any
QR code reader app
or visit [YouTube.com/ECCOSafety](https://www.youtube.com/ECCOSafety)



Video

lightbars LED



12 Series LED Lightbar

Available in-cab controller

33 flash patterns

Aluminium chassis, polycarbonate base and lens

SYMBOLS

-  LED Module
-  LED Stop/Tail/Turn Lights
-  LED Worklamps
-  LED Alley Lights

OPTIONAL ACCESSORY

EZ0006 The optional controller provides convenient and easy control of the 24 built-in flash patterns and auxiliary LED modules (where applicable). Simply plug-n-play, each lightbar is shipped with 'controller ready' wiring for fast, easy installation.



AVAILABLE COLOURS


 Amber  Blue  Clear  Green  Red

DIMENSIONS

64mm H x 279mm W


Controller

90mm H x 149mm W x 18mm D

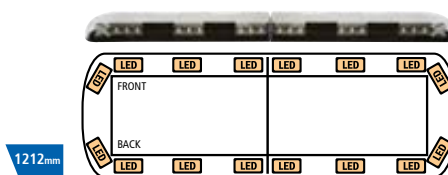


12-10021-V

- C** Amber
- T** 16 LEDs
- V** 12-24
- A** 7.2
-  R65, SAE Class I, R10
-  3 Year

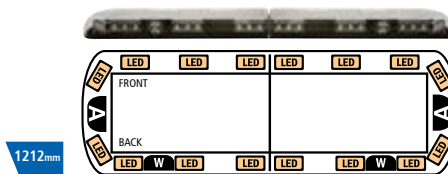

12-10024-V

- C** Amber
- T** 16 LEDs, 2 WL, 2 AL
- V** 12-24
- A** 10.8
-  R65, SAE Class I, R10
-  3 Year

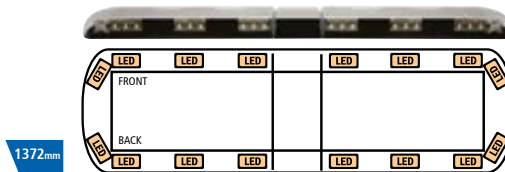

12-10022-V

- C** Amber
- T** 16 LEDs
- V** 12-24
- A** 7.2
-  R65, SAE Class I, R10
-  3 Year




lightbars LED



1372mm

- # 12-10025-V
- C Amber
- T 16 LEDs, 2 WL, 2 AL
- V 12-24
- A 11.6
- ✓ R65, SAE Class I, R10
- 🕒 3 Year

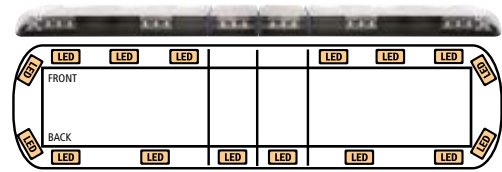

1524mm

- # 12-10023-V
- C Amber
- T 16 LEDs
- V 12-24
- A 7.2
- ✓ R65, SAE Class I, R10
- 🕒 3 Year



1524mm

- # 12-10027-V
- C Amber
- T 16 LEDs
- V 12-24
- A 7.2
- ✓ R65, SAE Class I, R10
- 🕒 3 Year



1524mm

- # 12-10026-V
- C Amber
- T 16 LEDs, 2 WL, 2 AL
- V 12-24
- A 11.6
- ✓ R65, SAE Class I, R10
- 🕒 3 Year

**ADDITIONAL COLOURS &
CUSTOM CONFIGURATIONS AVAILABLE**

Simply contact Customer Service to discuss your requirements

lightbars LED



15 Series LED Lightbar

Low profile aerodynamic styling
Aluminium base, polycarbonate lens

SYMBOLS

 LED Module

DIMENSIONS

55mm H x 310mm W

**ADDITIONAL COLOURS &
CUSTOM CONFIGURATIONS AVAILABLE**
Simply contact Customer Service to discuss your requirements



590mm

15-00013-V
C Amber
T 6 LEDs
V 12
A 4.2
R10
2 Year Lightbar
5 Year Electrical

15-00046-V
Amber
6 LEDs
24
2.1
R10
2 Year Lightbar
5 Year Electrical



590mm

15-00015-V
C Amber
T 8 LEDs
V 12
A 5.6
R10
2 Year Lightbar
5 Year Electrical

15-00047-V
Amber
8 LEDs
24
2.8
R10
2 Year Lightbar
5 Year Electrical



590mm

15-00019-V
C Amber
T 10 LEDs
V 12
A 7.0
R10
2 Year Lightbar
5 Year Electrical

15-00048-V
Amber
10 LEDs
24
3.5
R10
2 Year Lightbar
5 Year Electrical



lightbars LED



980mm

15-00035-V
C Amber
T 8 LEDs
V 12
A 5.6
R10
2 Year Lightbar
5 Year Electrical

15-00174-V
Amber
8 LEDs
24
2.8
R10
2 Year Lightbar
5 Year Electrical



1372mm

15-00038-V
C Amber
T 14 LEDs
V 12
A 9.8
R10
2 Year Lightbar
5 Year Electrical

15-00170-V
Amber
14 LEDs
24
4.9
R10
2 Year Lightbar
5 Year Electrical



1240mm

15-00036-V
C Amber
T 8 LEDs
V 12
A 5.6
R10
2 Year Lightbar
5 Year Electrical

15-00126-V
Amber
8 LEDs
24
2.8
R10
2 Year Lightbar
5 Year Electrical



1500mm

15-00172-V
C Amber
T 14 LEDs
V 12
A 9.8
R10
2 Year Lightbar
5 Year Electrical

15-00173-V
Amber
14 LEDs
24
4.9
R10
2 Year Lightbar
5 Year Electrical



1240mm

15-00163-V
C Amber
T 12 LEDs
V 12
A 8.4
R10
2 Year Lightbar
5 Year Electrical

15-00143-V
Amber
12 LEDs
24
4.2
R10
2 Year Lightbar
5 Year Electrical



1500mm

15-00330-V
C Amber
T 16 LEDs
V 12
A 11.2
R10
2 Year Lightbar
5 Year Electrical

15-00274-V
Amber
16 LEDs
24
5.6
R10
2 Year Lightbar
5 Year Electrical

lightbars LED



15 Lumi Series LED Lightbar

Low profile aerodynamic styling
Aluminium base, polycarbonate lens

SYMBOLS

-  LED Module
-  Opal Centre


DIMENSIONS

55mm H x 310mm W

**ADDITIONAL COLOURS &
CUSTOM CONFIGURATIONS AVAILABLE**
Simply contact Customer Service to discuss your requirements




590mm



- # 15L-01325-V
- C Amber
- T 12 Lux LEDs
- V 12-24
- A 4.8
-  R10, R65
-  2 Year Lightbar
-  5 Year Electrical




980mm



- # 15L-01326-V
- C Amber
- T 12 Lux LEDs with Opal centre
- V 12-24
- A 4.8
-  R10, R65
-  2 Year Lightbar
-  5 Year Electrical



1240mm



- # 15L-01327-V
- C Amber
- T 12 Lux LEDs with Opal centre
- V 12-24
- A 4.8
-  R10, R65
-  2 Year Lightbar
-  5 Year Electrical

PLEASE NOTE:


LED Centre Illumination available on request. Class II configurations available on request.



lightbars LED



1372mm




15L-01328-V

- C** Amber
- T** 16 Lux LEDs with Opal centre
- V** 12-24
- A** 6.4
- ✓ R10, R65
- 🕒 2 Year Lightbar
5 Year Electrical



1500mm




15L-01329-V

- C** Amber
- T** 16 Lux LEDs with Opal centre
- V** 12-24
- A** 6.4
- ✓ R10, R65
- 🕒 2 Year Lightbar
5 Year Electrical




1760mm



15L-01330-V

- C** Amber
- T** 24 Lux LEDs with Opal centre
- V** 12-24
- A** 9.6
- ✓ R10, R65
- 🕒 2 Year Lightbar
5 Year Electrical

lightbars LED

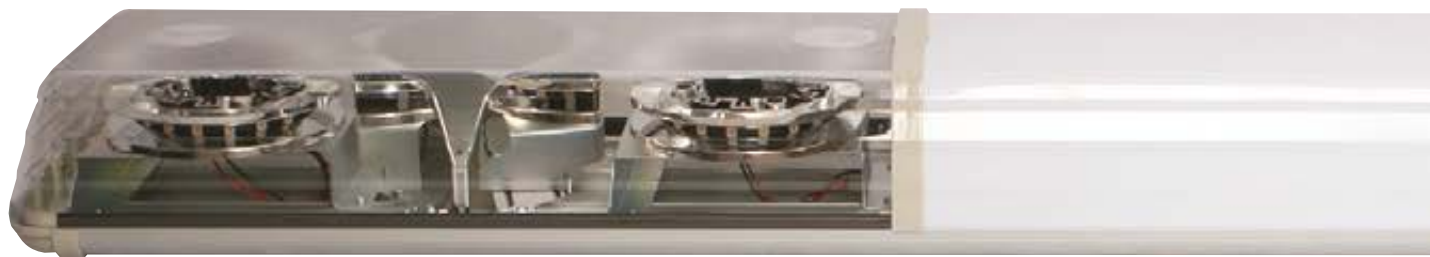

60 Series Halo LED Lightbar

Mid profile aerodynamic styling
360° Halo LED technology
Aluminium base, polycarbonate lens

SYMBOLS

-  LED Module
-  Halo Module
-  Mirror


DIMENSIONS

110mm H x 210mm W

**ADDITIONAL COLOURS &
CUSTOM CONFIGURATIONS AVAILABLE**
Simply contact Customer Service to discuss your requirements



570mm



60-00424-V
C Amber
T 2 Halo LEDs
V 12
A 4.4
✓ R10, R65
⌚ 2 Year

60-00465-V
Amber
2 Halo LEDs
24
2.2
R10, R65
2 Year



742mm



60-00425-V
C Amber
T 2 Halo LEDs,
illuminated centre
V 12
A 8.0
✓ R10, R65
⌚ 2 Year

60-00466-V
Amber
2 Halo LEDs,
illuminated centre
24
4.0
R10, R65
2 Year



1000mm



60-00426-V
C Amber
T 2 Halo LEDs,
illuminated centre
V 12
A 8.0
✓ R10, R65
⌚ 2 Year

60-00467-V
Amber
2 Halo LEDs,
illuminated centre
24
4.0
R10, R65
2 Year



1212mm

60-00427-V
C Amber
T 2 Halo LEDs, illuminated centre
V 12
A 8.0
 R10, R65
 2 Year

60-00468-V
C Amber
T 2 Halo LEDs, illuminated centre
V 24
A 4.0
 R10, R65
 2 Year

1372mm

60-01008-V
C Amber
T 2 Halo LEDs, 2 VigiLEDs, illuminated centre
V 12
A 9.0
 R10, R65
 2 Year

60-01009-V
C Amber
T 2 Halo LEDs, 2 VigiLEDs, illuminated centre
V 24
A 4.5
 R10, R65
 2 Year

1372mm

60-00428-V
C Amber
T 2 Halo LEDs, illuminated centre
V 12
A 8.0
 R10, R65
 2 Year

60-00469-V
C Amber
T 2 Halo LEDs, illuminated centre
V 24
A 4.0
 R10, R65
 2 Year

1524mm

60-00527-V
C Amber
T 4 Halo LEDs, illuminated centre
V 12
A 13.0
 R10, R65
 2 Year

60-00528-V
C Amber
T 4 Halo LEDs, illuminated centre
V 24
A 6.5
 R10, R65
 2 Year

1372mm

60-00429-V
C Amber
T 4 Halo LEDs, illuminated centre
V 12
A 8.8
 R10, R65
 2 Year


60-00470-V
C Amber
T 4 Halo LEDs, illuminated centre
V 24
A 4.4
 R10, R65
 2 Year

1829mm

60-00529-V
C Amber
T 4 Halo LEDs, illuminated centre
V 12
A 13.0
 R10, R65
 2 Year

60-00530-V
C Amber
T 4 Halo LEDs, illuminated centre
V 24
A 6.5
 R10, R65
 2 Year

lightbars LED

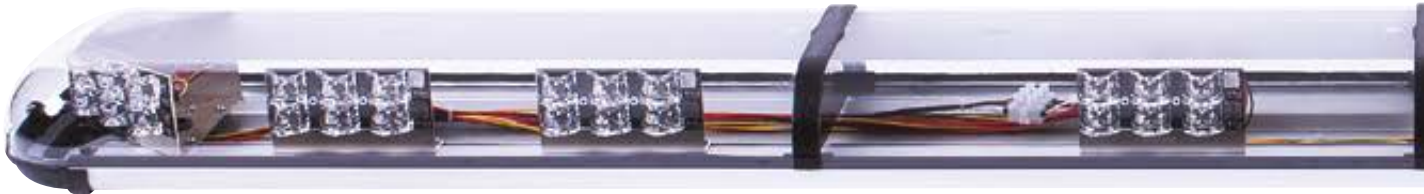

65 Series

R65 LED Lightbar

- Lower profile styling with high intensity LEDs
- Rigid aluminium base
- Tough polycarbonate lens

SYMBOLS


 LED Module

DIMENSIONS

82mm H x 215mm W

ADDITIONAL COLOURS &
CUSTOM CONFIGURATIONS AVAILABLE

Simply contact Customer Service to discuss your requirements

630mm

65-00001-V

C Amber

T 8 LEDs


V 12-24

A 7.2

✓ R10, R65 Class I

⌚ 2 Year Lightbar

5 Year Electrical

1063mm

65-00002-V

C Amber

T 8 LEDs

V 12-24

A 7.2

✓ R10, R65 Class I

⌚ 2 Year Lightbar

5 Year Electrical




1275mm

65-00021-V

C Amber

T 8 LEDs

V 12-24

A 7.2

✓ R10, R65 Class I

⌚ 2 Year Lightbar


5 Year Electrical

PLEASE NOTE:

LED Centre Illumination available on request. Class II configurations available on request.



lightbars LED

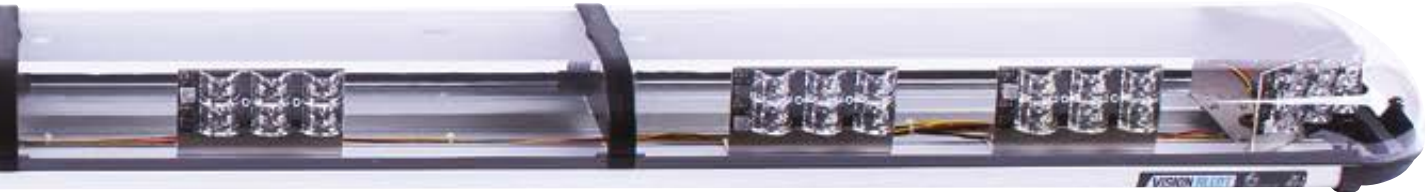

1275mm

- # 65-00003-V
- C Amber
- T 8 LEDs
- V 12-24
- A 7.2
- ✓ R10, R65 Class I
- ⌚ 2 Year Lightbar
- 5 Year Electrical



1590mm

- # 65-00005-V
- C Amber
- T 12 LED
- V 12-24
- A 10.8
- ✓ R10, R65 Class I
- ⌚ 2 Year Lightbar
- 5 Year Electrical



1435mm

- # 65-00004-V
- C Amber
- T 8 LEDs
- V 12-24
- A 7.2
- ✓ R10, R65 Class I
- ⌚ 2 Year Lightbar
- 5 Year Electrical



1590mm

- # 65-00063-V
- C Amber
- T 16 LEDs
- V 12-24
- A 14.4
- ✓ R10, R65 Class I
- ⌚ 2 Year Lightbar
- 5 Year Electrical



1435mm

- # 65-00065-V
- C Amber
- T 8 LEDs
- V 12-24
- A 7.2
- ✓ R10, R65 Class I
- ⌚ 2 Year Lightbar
- 5 Year Electrical



1890mm

- # 65-00045-V
- C Amber
- T 10 LEDs
- V 12-24
- A 9.0
- ✓ R10, R65 Class I
- ⌚ 2 Year Lightbar
- 5 Year Electrical

lightbars LED



70 Series

LED Lightbar

- High profile design
- Aluminium base
- LED centre illumination

SYMBOLS

LED Module

Mirror

DIMENSIONS

140mm H x 210mm W

ADDITIONAL COLOURS & CUSTOM CONFIGURATIONS AVAILABLE

Simply contact Customer Service to discuss your requirements



570mm

- # 70-00518-V
- C Amber
- T 2 LEDs
- V 12-24
- A 2.8
- ✓ R10, R65
- ⌚ 1 Year



742mm

- # 70-00519-V
- C Amber
- T 2 LEDs, LED centre illumination
- V 12-24
- A 2.8
- ✓ R10, R65
- ⌚ 1 Year



1000mm

- # 70-00507-V
- C Amber
- T 2 LEDs, LED centre illumination
- V 12-24
- A 2.8
- ✓ R10, R65
- ⌚ 1 Year



lightbars LED



1212mm

- # **70-00508-V**
C Amber
T 2 LEDs, LED centre illumination
V 12-24
A 2.8
✓ R10, R65
🕒 1 Year



1829mm

- # **70-00510-V**
C Amber
T 2 LEDs, LED centre illumination
V 12-24
A 2.8
✓ R10, R65
🕒 1 Year



1372mm

- # **70-00517-V**
C Amber
T 2 LEDs, LED centre illumination
V 12-24
A 2.8
✓ R10, R65
🕒 1 Year



1524mm

- # **70-00509-V**
C Amber
T 2 LEDs, LED centre illumination
V 12-24
A 2.8
✓ R10, R65
🕒 1 Year

lightbars Xenon



60 Series

Xenon Lightbar

Mid profile aerodynamic styling

Aluminium base, polycarbonate lens

EVOLUTION

SYMBOLS

- ⊕ Xenon Module
- ◊ Mirror

DIMENSIONS

110mm H x 210mm W



742mm



6F2.3A01

C Amber
V 12
A 8.0
✓ R10, R65
⌚ 1 Year Lightbar
6 month Tube

6F2.3A02

Amber
24
5.0
R10, R65
1 Year Lightbar
6 month Tube

6A2.3A01

C Amber
V 12
A 5.0
✓ R10
⌚ 1 Year Lightbar
6 month Tube

6A2.3A02

Amber
24
2.5
R10
1 Year Lightbar
6 month Tube



742mm



6F4.3A01

C Amber
V 12
A 8.0
✓ R10, R65
⌚ 1 Year Lightbar
6 month Tube

6F4.3A02

Amber
24
5.0
R10, R65
1 Year Lightbar
6 month Tube

6A4.3A01

C Amber
V 12
A 5.0
✓ R10
⌚ 1 Year Lightbar
6 month Tube

6A4.3A02

Amber
24
2.5
R10
1 Year Lightbar
6 month Tube



1000mm



6F3.3A01

C Amber
V 12
A 8.0
✓ R10, R65
⌚ 1 Year Lightbar
6 month Tube

6F3.3A02

Amber
24
5.0
R10, R65
1 Year Lightbar
6 month Tube

6A3.3A01

C Amber
V 12
A 5.0
✓ R10
⌚ 1 Year Lightbar
6 month Tube

6A3.3A02

Amber
24
2.5
R10
1 Year Lightbar
6 month Tube



1212mm



6G4.0A00

C Amber
V 10-30
A 8.0
✓ R10, R65
⌚ 1 Year Lightbar
6 month Tube

6B4.0A00

Amber
10-30
5.0
R10
1 Year Lightbar
6 month Tube

1372mm

#	6G8.0A00	6B8.0A00
C	Amber	Amber
V	10-30	10-30
A	8.0	8.0
✓	R10, R65	R10
⌚	1 Year Lightbar	1 Year Lightbar
	6 month Tube	6 month Tube

1372mm

#	6G8.3A01	6G8.3A02
C	Amber	Amber
V	12	24
A	8.0	8.0
✓	R10, R65	R10, R65
⌚	1 Year Lightbar	1 Year Lightbar
	6 month Tube	6 month Tube

#	6B8.3A01	6B8.3A02
C	Amber	Amber
V	12	24
A	8.0	8.0
✓	R10	R10
⌚	1 Year Lightbar	1 Year Lightbar
	6 month Tube	6 month Tube

1524mm

#	6G5.0A00	6B5.0A00
C	Amber	Amber
V	10-30	10-30
A	8.0	8.0
✓	R10, R65	R10
⌚	1 Year Lightbar	1 Year Lightbar
	6 month Tube	6 month Tube

1524mm

#	6G5.3A01	6G5.3A02
C	Amber	Amber
V	12	24
A	8.0	8.0
✓	R10, R65	R10, R65
⌚	1 Year Lightbar	1 Year Lightbar
	6 month Tube	6 month Tube

#	6B5.3A01	6B5.3A02
C	Amber	Amber
V	12	24
A	8.0	8.0
✓	R10	R10
⌚	1 Year Lightbar	1 Year Lightbar
	6 month Tube	6 month Tube

1829mm

#	6G6.3A01	6G6.3A02
C	Amber	Amber
V	12	24
A	8.0	8.0
✓	R10, R65	R10, R65
⌚	1 Year Lightbar	1 Year Lightbar
	6 month Tube	6 month Tube

#	6B6.3A01	6B6.3A02
C	Amber	Amber
V	12	24
A	8.0	8.0
✓	R10	R10
⌚	1 Year Lightbar	1 Year Lightbar
	6 month Tube	6 month Tube

ADDITIONAL COLOURS & CUSTOM CONFIGURATIONS AVAILABLE
Simply contact Customer Service to discuss your requirements

lightbars Rotating



60 Series

Rotating Lightbar

Mid profile aerodynamic styling

Free-form reflectors give even light intensity over greater areas, maximising light output

Aluminium base, polycarbonate lens

SYMBOLS

-  Rotator Module
-  Mirror
-  LED Module
-  Worklamp
-  LED Stop/Tail Indicator

DIMENSIONS

110mm H x 210mm W



600.AA01
C Amber
V 12
A 9.2
✓ R10, R65
⌚ 1 Year Lightbar
3 month Bulb

600.AA02
Amber
24
5.6
R10, R65
1 Year Lightbar
3 month Bulb



623.AA01
C Amber
V 12
A 18.4
✓ R10
⌚ 1 Year Lightbar
3 month Bulb

623.AA02
Amber
24
11.2
R10
1 Year Lightbar
3 month Bulb



602.3A01
C Amber
V 12
A 9.2
✓ R10, R65
⌚ 1 Year Lightbar
3 month Bulb

602.3A02
Amber
24
5.6
R10, R65
1 Year Lightbar
3 month Bulb



603.3A01.AAAAAB
C Amber
V 12
A 13.2
✓ R10, R65
⌚ 1 Year Lightbar
3 month Bulb

603.3A02.AAAAAB
Amber
24
7.6
R10, R65
1 Year Lightbar
3 month Bulb



603.3A01
C Amber
V 12
A 9.2
✓ R10, R65
⌚ 1 Year Lightbar
3 month Bulb

603.3A02
Amber
24
5.6
R10, R65
1 Year Lightbar
3 month Bulb



604.3A01.ACAA
C Amber
V 12
A 10.2
✓ R10, R65
⌚ 1 Year Lightbar
3 month Bulb

604.3A02.ACAA
Amber
24
9.7
R10, R65
1 Year Lightbar
3 month Bulb

lightbars Rotating



1212mm

↻ <	illuminated	> ↻
-----	-------------	-----

# 604.3A01	604.3A02
C Amber	Amber
V 12	24
A 9.2	5.6
✓ R10, R65	R10, R65
🕒 1 Year Lightbar	1 Year Lightbar
3 month Bulb	3 month Bulb



1212mm

↻ W	illuminated	W ↻
-----	-------------	-----

# 604.3A01.CAAA	604.3A02.CAAA
C Amber	Amber
V 12	24
A 30.4	17.2
✓ R10, R65	R10, R65
🕒 1 Year Lightbar	1 Year Lightbar
3 month Bulb	3 month Bulb



1212mm

↻	◊	↻	◊	↻	◊	↻
---	---	---	---	---	---	---

# 624.0A01.AAAB	624.0A02.AAAB
C Amber	Amber
V 12	24
A 18.4	11.2
✓ R10, R65	R10, R65
🕒 1 Year Lightbar	1 Year Lightbar
3 month Bulb	3 month Bulb

# 624.0A01	624.0A02
C Amber	Amber
V 12	24
A 18.4	11.2
✓ R10	R10
🕒 1 Year Lightbar	1 Year Lightbar
3 month Bulb	3 month Bulb



1212mm

↻	◊	↻	illuminated	↻	◊	↻
---	---	---	-------------	---	---	---

# 624.3A01.AAAB	624.3A02.AAAB
C Amber	Amber
V 12	24
A 18.4	11.2
✓ R10, R65	R10, R65
🕒 1 Year Lightbar	1 Year Lightbar
3 month Bulb	3 month Bulb

# 624.3A01	624.3A02
C Amber	Amber
V 12	24
A 9.2	5.6
✓ R10	R10
🕒 1 Year Lightbar	1 Year Lightbar
3 month Bulb	3 month Bulb



1372mm

↻ <	illuminated	> ↻
-----	-------------	-----

# 608.3A01	608.3A02
C Amber	Amber
V 12	24
A 9.2	5.6
✓ R10, R65	R10, R65
🕒 1 Year Lightbar	1 Year Lightbar
3 month Bulb	3 month Bulb



1372mm

↻	◊	↻	◊	↻	◊	↻
---	---	---	---	---	---	---

# 628.0A01.AAAB	628.0A02.AAAB
C Amber	Amber
V 12	24
A 18.4	11.2
✓ R10, R65	R10, R65
🕒 1 Year Lightbar	1 Year Lightbar
3 month Bulb	3 month Bulb

# 628.0A01	628.0A02
C Amber	Amber
V 12	24
A 18.4	11.2
✓ R10, R65	R10, R65
🕒 1 Year Lightbar	1 Year Lightbar
3 month Bulb	3 month Bulb

lightbars Rotating

60 Series

Rotating Lightbar



#	628.3A01.AAAB	628.3A02.AAAB
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

#	628.3A01	628.3A02
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10	R10
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb



#	625.0A01.AAAB	625.0A02.AAAB
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb


#	625.0A01	625.0A02
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10	R10
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb



#	605.3A01	605.3A02
C	Amber	Amber
V	12	24
A	9.2	5.6
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb




#	6W5.0A01	6W5.0A02
C	Amber	Amber
V	12	24
A	27.6	16.8
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb



#	625.3A01.ACAA	625.3A02.ACAA
C	Amber	Amber
V	12	24
A	19.4	11.7
✓	R10	R10
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb



#	625.3A01.AAAA9R	625.3A02.AAAA9R
C	Amber	Amber
V	12	24
A	22.4	13.2
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb



1524mm



#	605.3A01.CAAA	605.3A02.CAAA
C	Amber	Amber
V	12	24
A	30.4	17.2
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

ADDITIONAL COLOURS & CUSTOM CONFIGURATIONS AVAILABLE

Simply contact Customer Service to discuss your requirements



1829mm



#	626.0A01.AAAB	626.0A02.AAAB
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

#	626.0A01	626.0A02
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10	R10
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb



1829mm



#	626.3A01.AAAB	626.3A02.AAAB
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

#	626.3A01	626.3A02
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10	R10
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

lightbars Xenon



70 Series

Xenon Lightbar

High profile modern styling

Free-form reflectors give and even light intensity over greater areas, maximising light output

Aluminium base and Polycarbonate lens

SYMBOLS

- ⊕ Xenon Module
- ◊ Mirror

DIMENSIONS

140mm H x 210mm W



7F0.000

- C Amber
- V 10-30
- A 8.0
- ✓ R10, R65
- ⌚ 1 Year Lightbar
- 6 month Tube

710.000

- Amber
- 10-48
- 5.0
- R10
- 1 Year Lightbar
- 6 month Tube



740.000

- C Amber
- V 10-48
- A 5.0
- ✓ R10
- ⌚ 1 Year Lightbar
- 6 month Tube



7F3.001

- C Amber
- V 12
- A 8.0
- ✓ R10, R65
- ⌚ 1 Year Lightbar
- 6 month Tube

7F3.002

- Amber
- 24
- 8.0
- R10, R65
- 1 Year Lightbar
- 6 month Tube

713.001

- C Amber
- V 12
- A 5.0
- ✓ R10
- ⌚ 1 Year Lightbar
- 6 month Tube

713.002

- Amber
- 24
- 5.0
- R10
- 1 Year Lightbar
- 6 month Tube



7F4.001

- C Amber
- V 12
- A 8.0
- ✓ R10, R65
- ⌚ 1 Year Lightbar
- 6 month Tube

7F4.002

- Amber
- 24
- 8.0
- R10, R65
- 1 Year Lightbar
- 6 month Tube

714.001

- C Amber
- V 12
- A 5.0
- ✓ R10
- ⌚ 1 Year Lightbar
- 6 month Tube

714.002

- Amber
- 24
- 5.0
- R10
- 1 Year Lightbar
- 6 month Tube



744.001

- C Amber
- V 12
- A 5.0
- ✓ R10
- ⌚ 1 Year Lightbar
- 6 month Tube

744.002

- Amber
- 24
- 5.0
- R10
- 1 Year Lightbar
- 6 month Tube



734.500

- C Amber
- V 10-48
- A 10.0
- ✓ R10
- ⌚ 1 Year Lightbar
- 6 month Tube

754.500

- Amber
- 10-48
- 10.0
- R10
- 1 Year Lightbar
- 6 month Tube

1372mm



⊕ <	Illuminated	> ⊕
-----	-------------	-----

# 7F8.001	7F8.002
C Amber	Amber
V 12	24
A 8.0	8.0
✓ R10, R65	R10, R65
⌚ 1 Year Lightbar	1 Year Lightbar
6 month Tube	6 month Tube

1372mm



⊕ ◊ ⊕	Illuminated	⊕ ◊ ⊕
-------	-------------	-------

# 738.001	738.002
C Amber	Amber
V 12	24
A 10.0	10.0
✓ R10	R10
⌚ 1 Year Lightbar	1 Year Lightbar
6 month Tube	6 month Tube

1524mm



⊕ <	Illuminated	> ⊕
-----	-------------	-----

# 7F5.001	7F5.002
C Amber	Amber
V 12	24
A 8.0	8.0
✓ R10, R65	R10, R65
⌚ 1 Year Lightbar	1 Year Lightbar
6 month Tube	6 month Tube

# 715.001	715.002
C Amber	Amber
V 12	24
A 5.0	5.0
✓ R10	R10
⌚ 1 Year Lightbar	1 Year Lightbar
6 month Tube	6 month Tube

1524mm



⊕ <	Illuminated	> ⊕
-----	-------------	-----

# 7G5.001	7G5.002
C Amber	Amber
V 12	24
A 8.0	8.0
✓ R10, R65	R10, R65
⌚ 1 Year Lightbar	1 Year Lightbar
6 month Tube	6 month Tube

# 735.001	735.002
C Amber	Amber
V 12	24
A 5.0	5.0
✓ R10	R10
⌚ 1 Year Lightbar	1 Year Lightbar
6 month Tube	6 month Tube

1524mm



⊕ ◊ ⊕	Illuminated	⊕ ◊ ⊕
-------	-------------	-------

# 755.001	755.002
C Amber	Amber
V 12	24
A 10.0	10.0
✓ R10	R10
⌚ 1 Year Lightbar	1 Year Lightbar
6 month Tube	6 month Tube

1524mm




⊕ ◊ ⊕ <	Illuminated	> ⊕ ◊ ⊕
---------	-------------	---------

# 756.001	756.002
C Amber	Amber
V 12	24
A 10.0	10.0
✓ R10	R10
⌚ 1 Year Lightbar	1 Year Lightbar
6 month Tube	6 month Tube

ADDITIONAL COLOURS & CUSTOM CONFIGURATIONS AVAILABLE
Simply contact Customer Service to discuss your requirements

lightbars Rotating



70 Series Rotating Lightbar

High profile styling

Free-form reflectors give even light intensity over greater areas, maximising light output

Aluminium base and Polycarbonate lens

SYMBOLS

-  Rotator Module
-  Mirror

DIMENSIONS

110mm H x 210mm W



700.001

C Amber
V 12
A 9.2
✓ R10, R65
⌚ 1 Year Lightbar
3 month Bulb

700.002

Amber
24
5.6
R10, R65
1 Year Lightbar
3 month Bulb



704.001

C Amber
V 12
A 9.2
✓ R10, R65
⌚ 1 Year Lightbar
3 month Bulb

704.002

Amber
24
5.6
R10, R65
1 Year Lightbar
3 month Bulb



702.001

C Amber
V 12
A 9.2
✓ R10, R65
⌚ 1 Year Lightbar
3 month Bulb

702.002

Amber
24
5.6
R10, R65
1 Year Lightbar
3 month Bulb



724.Y01.AWA

C Amber
V 12
A 18.4
✓ R10, R65
⌚ 1 Year Lightbar
3 month Bulb

724.Y02.AWA

Amber
24
11.2
R10, R65
1 Year Lightbar
3 month Bulb



703.001

C Amber
V 12
A 9.2
✓ R10, R65
⌚ 1 Year Lightbar
3 month Bulb

703.002

Amber
24
5.6
R10, R65
1 Year Lightbar
3 month Bulb

724.Y01

C Amber
V 12
A 18.4
✓ R10, R65
⌚ 1 Year Lightbar
3 month Bulb

724.Y02

Amber
24
11.2
R10, R65
1 Year Lightbar
3 month Bulb

lightbars Rotating

1372mm



#	708.001	708.002
C	Amber	Amber
V	12	24
A	9.2	5.6
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

1372mm



#	728.001.AWA	728.002.AWA
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

#	728.001	728.002
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10	R10
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

1524mm



#	705.001	705.002
C	Amber	Amber
V	12	24
A	9.2	5.6
✓	R10	R10
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

1524mm



#	725.001.AWA	725.002.AWA
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

1524mm

#	725.001	725.002
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10	R10
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

1829mm



#	726.001.AWA	726.002.AWA
C	Amber	Amber
V	12	24
A	18.4	11.2
✓	R10, R65	R10, R65
⌚	1 Year Lightbar 3 month Bulb	1 Year Lightbar 3 month Bulb

ADDITIONAL COLOURS & CUSTOM CONFIGURATIONS AVAILABLE
Simply contact Customer Service to discuss your requirements

Worklamp Lumen Ratings

Raw Lumens

The lumen output of a worklamp measured between 30 and 120 seconds after the light has been activated.

Effective Lumens

The lumen output of a worklamp after the device has been running steadily for 30 minutes. This measurement allows for thermal and optical losses in light output as the lamp warms to normal operation.

All lumen ratings are measured using an Integrating Sphere and are not based on mathematical calculation.

Please note:

Specific connectors can be fitted on request



FLOOD BEAM

A wide, medium range beam ideal for general work area illumination



SPOT BEAM

A narrowly focused, long range beam ideal for focusing on a specific area

For representation only. Actual beam pattern may vary.



Turn night into day

Whether you are hooking up your fifth wheel, winching onto your recovery truck or harvesting crops at night, ECCO's comprehensive range of worklamps will provide all the light you need to get the job done – safely!



EW2102 Series

Square LED

Eight 3-watt LEDs
 ECCO Lo-Glo™ obstruction marker light
 Moisture wicking vent
 Aluminium heatsink housing
 Polycarbonate lens
 UV hardcoat

- # EW2102
- V 12-24
- A 2.6
- L 2000 Raw, 1600 Effective
- Flood
- IP67
- 3 Year

DIMENSIONS
 124mm H x 110mm W x 55mm D
 137mm H including bracket



EW2101 Series

Square LED

Six 3-watt LEDs
 Clear and amber illumination available
 Aluminium heatsink housing
 Polycarbonate lens

- | | |
|---|---|
| 
EW2101
V 12-24
A 1.9
L 1650 Raw, 1400 Effective
Flood
IP67, R10, CE
3 Year | 
EW2101A
C Amber
V 12-24
A 1.8
Flood
IP67, R10, CE
3 Year |
|---|---|

DIMENSIONS
 124mm H x 110mm W x 55mm D
 137mm H including bracket





EW2461

Square Magnetic LED

Five 3-watt LEDs
Rechargeable lithium battery
Estimated run time is 3-4 hours
Aluminium heatsink housing
Polycarbonate lens

EW2461
V 12-24
L 650 Raw, 600 Effective
Flood
X Magnetic
⌚ 1 Year

Includes cigarette plug charger only

EW2461-UK
V 12-24
L 650 Raw, 600 Effective
Flood
X Magnetic
⌚ 1 Year

Includes cigarette plug charger & UK AC plug adapter

EW2461-EU
V 12-24
L 650 Raw, 600 Effective
Flood
X Magnetic
⌚ 1 Year

Includes cigarette plug charger & EU AC plug adapter

DIMENSIONS
195mm H x 115mm W x 100mm D
230mm H including handle

DISCLAIMER:
Product performance and specifications are based upon evaluation of a fully-charged new battery. It is normal for all batteries to degrade and lose capacity over time.

EW2450 Series

Square LED

Nine 3-watt LEDs

On/off switch

360° stainless steel rotation axis

Removable handle (reinforced nylon)

Aluminium heatsink housing

Polycarbonate lens



EW2451

V 12-24

A 2.2

L 1300 Raw, 1100 Effective

Flood

Permanent

CE

3 Year



EW2450

V 12-24

A 2.2

L 1300 Raw, 1100 Effective

Spot

Permanent

CE

3 Year

DIMENSIONS

131mm H x 110mm W x 83mm D
205mm H including handle



Rotation axis



On/off switch



EW2470 Series

Mini Square LED

Five 3-watt LEDs

Aluminium heatsink housing

Polycarbonate lens



EW2471
V 12-24
A 0.8
L 600 Raw, 550 Effective
 Flood
 CE, R10
 3 Year



EW2470
 12-24
 0.8
 600 Raw, 550 Effective
 Spot
 CE, R10
 3 Year

DIMENSIONS

98mm H x 85mm W x 42mm D
 108mm H including bracket



EW2401

Mini Modular Square LED

Five 3-watt LEDs

Can be connected vertically or horizontally

Magnesium alloy housing

Polycarbonate lens

EW2401
V 12-24
A 0.9
L 600 Raw, 550 Effective
 Flood
 IP67, CE
 2 Year

DIMENSIONS

66mm H x 66mm W x 66mm D
 91mm H including bracket

EW2310 Series

Square LED

Nine 10-watt LEDs

High intensity beam

Heavy duty stainless steel bracket

Aluminium heatsink housing and polycarbonate lens



EW2311

V 12-24

A 5.3

L 4950 Raw, 3600 Effective

Flood

IP69K

3 Year



EW2310

V 12-24

A 5.3

L 5100 Raw, 3600 Effective

Spot

IP69K

3 Year



DIMENSIONS

139mm H x 144mm W x 117mm D

157mm H including bracket

EW2300 Series

Rectangular LED

Six 10-watt LEDs

High intensity beam

Aluminium heatsink housing

Toughened glass lens



EW2301

V 12-24

A 2.7

L 3000 Raw, 2600 Effective

Flood

CE

3 Year



EW2300

V 12-24

A 2.7

L 3100 Raw, 2700 Effective

Spot

CE

3 Year



DIMENSIONS

107mm H x 167mm W x 63mm D

125mm H including bracket



EW2411

Rectangular LED

Six 3-watt LEDs

Aluminium heatsink housing

Polycarbonate lens

- # EW2411
- V 12-24
- A 1.3
- L 100 Raw, 900 Effective
- Flood
- IP67, CE, R10
- 2 Year

DIMENSIONS

62mm H x 112mm W x 55mm D
88mm H including bracket



EW2431

Circular LED

14 3-watt LEDs

Aluminium heatsink housing

Polycarbonate lens

- # EW2431
- V 12-24
- A 3.1
- L 2600 Raw, 2100 Effective
- Flood
- IP67, CE
- 2 Year

DIMENSIONS

17mm H x 117mm W x 76mm D
135mm H including bracket

EW2501

Rectangular LED

Five 10-watt LEDs
High intensity beam
Aluminium heatsink housing
Polycarbonate lens

- # EW2501
- V 12-24
- A 3.0
- L 2900 Raw, 2450 Effective
- Flood
- IP67, CE
- 2 Year

DIMENSIONS
98mm H x 145mm W x 79mm D
135mm H including bracket



E92027/E92029-HV

Square LED

Five 3-watt LEDs
Aluminium heatsink housing
Steel mounting bracket

- | | |
|--------------------------|------------------------|
| # E92027 | E92029-HV |
| V 12-24 | 12-80 |
| A 1.2 | 1.2 |
| L 900 Raw, 850 Effective | 900 Raw, 850 Effective |
| Flood | Flood |
| IP67, CE | IP67, CE |
| 2 Year | 2 Year |

DIMENSIONS
128mm H x 110mm W x 46mm D
140mm H including bracket





EW2000 Series

Oval LED Pedestrian Spotlight

Four 3-watt LEDs
Blue or red spot projection
Pedestrian warning for material handling applications
Aluminium heatsink housing
Polycarbonate lens

#	EW2000B	EW2000R
V	Blue	Red
A	12-48	12-48
L	0.9	0.9
	Pedestrian Spot	Pedestrian Spot
	R10	R10
	3 Year	3 Year

DIMENSIONS
91mm H x 143mm W x 65mm D
121mm H including bracket



EW2010

Round LED Pedestrian Arrow

Three 3-watt LEDs
Blue arrow projection
Pedestrian warning for material handling applications
Aluminium heatsink housing
Polycarbonate lens

#	EW2010B	EW2010R
V	Blue	Red
A	12-60	12-60
L	0.6	0.6
	Warning arrow	Warning arrow
	R10	R10
	3 Year	3 Year

DIMENSIONS
102mm H x 95mm W x 89mm D
121mm H including bracket

E92004-E

Round LED

Six 3-watt LEDs

Aluminium heatsink housing

Acrylic lens

E92004-E

V 12-24

A 1.1

L 800 Raw, 700 Effective

Flood

CE, R10

2 Year

DIMENSIONS

116mm H x 116mm W x 48mm D

128mm H including bracket



E92005

Round LED

Eight 3-watt LEDs

Aluminium heatsink housing

Acrylic lens

E92005

V 12-24

A 1.2

L 1000 Raw, 950 Effective

Flood

CE

2 Year

DIMENSIONS

110mm H x 110mm W x 45mm D

128mm H including bracket





E92007-E

Square LED

Five 3-watt LEDs

Aluminium heatsink housing

Acrylic lens

- # E92007-E
- V 12-24
- A 1.1
- L 750 Raw, 700 Effective
- Flood
- CE, R10
- Permanent
- 2 Year

DIMENSIONS

110mm H x 110mm W x 46mm D
128mm H including bracket



E92014

Circular LED

Nine 3-watt LEDs

Die cast aluminium housing

- # E92014
- V 12-24
- A 2.2
- L 2000 Raw, 1950 Effective
- Flood
- IP67
- 2 Year

DIMENSIONS

135mm H x 120mm W x 50mm D
140mm H including bracket



worklamps Halogen



E91025
V 12
W 55
Flood
1 Year

DIMENSIONS
112mm H x 91mm W



E91099
V 12
W 55
Flood
1 Year

DIMENSIONS
135mm H x 99mm W



E91088 Twin
V 12
W 110
Flood
1 Year

DIMENSIONS
127mm H x 167mm W



E91104
V 12-24
W 55-70
Flood
1 Year

DIMENSIONS
152mm H x 126mm W



E91105
V 12-24
W 55-70
Flood
1 Year

DIMENSIONS
160mm H x 160mm



E91106
V 12-24
W 55
Flood
1 Year

DIMENSIONS
220mm H x 181mm W



E91107
V 12-24
W 55
Spot
1 Year

DIMENSIONS
240mm H x 200mm W



E91108
V 12-24
W 55
Flood
1 Year

DIMENSIONS
225mm H x 200mm W



E91109
V 12-24
W 55-70
Flood
1 Year

DIMENSIONS
116mm H x 181mm W

worklamps Halogen



E91110
V 12-24
W 55-70
Flood
1 Year

DIMENSIONS
140mm H x 160mm W



E91112
V 12-24
W 55-70
Flood
1 Year

DIMENSIONS
239mm H x 162mm W



E91114
V 12-24
W 55-70
Flood
1 Year

DIMENSIONS
207mm H x 140mm W




E91117
V 12-24
W 55
Flood
1 Year

DIMENSIONS
276mm H x 140mm W



# E91118	E91119
V 12-24	12-24
W 55	70
Flood	Flood
1 Year	1 Year

DIMENSIONS
220mm H x 150mm W

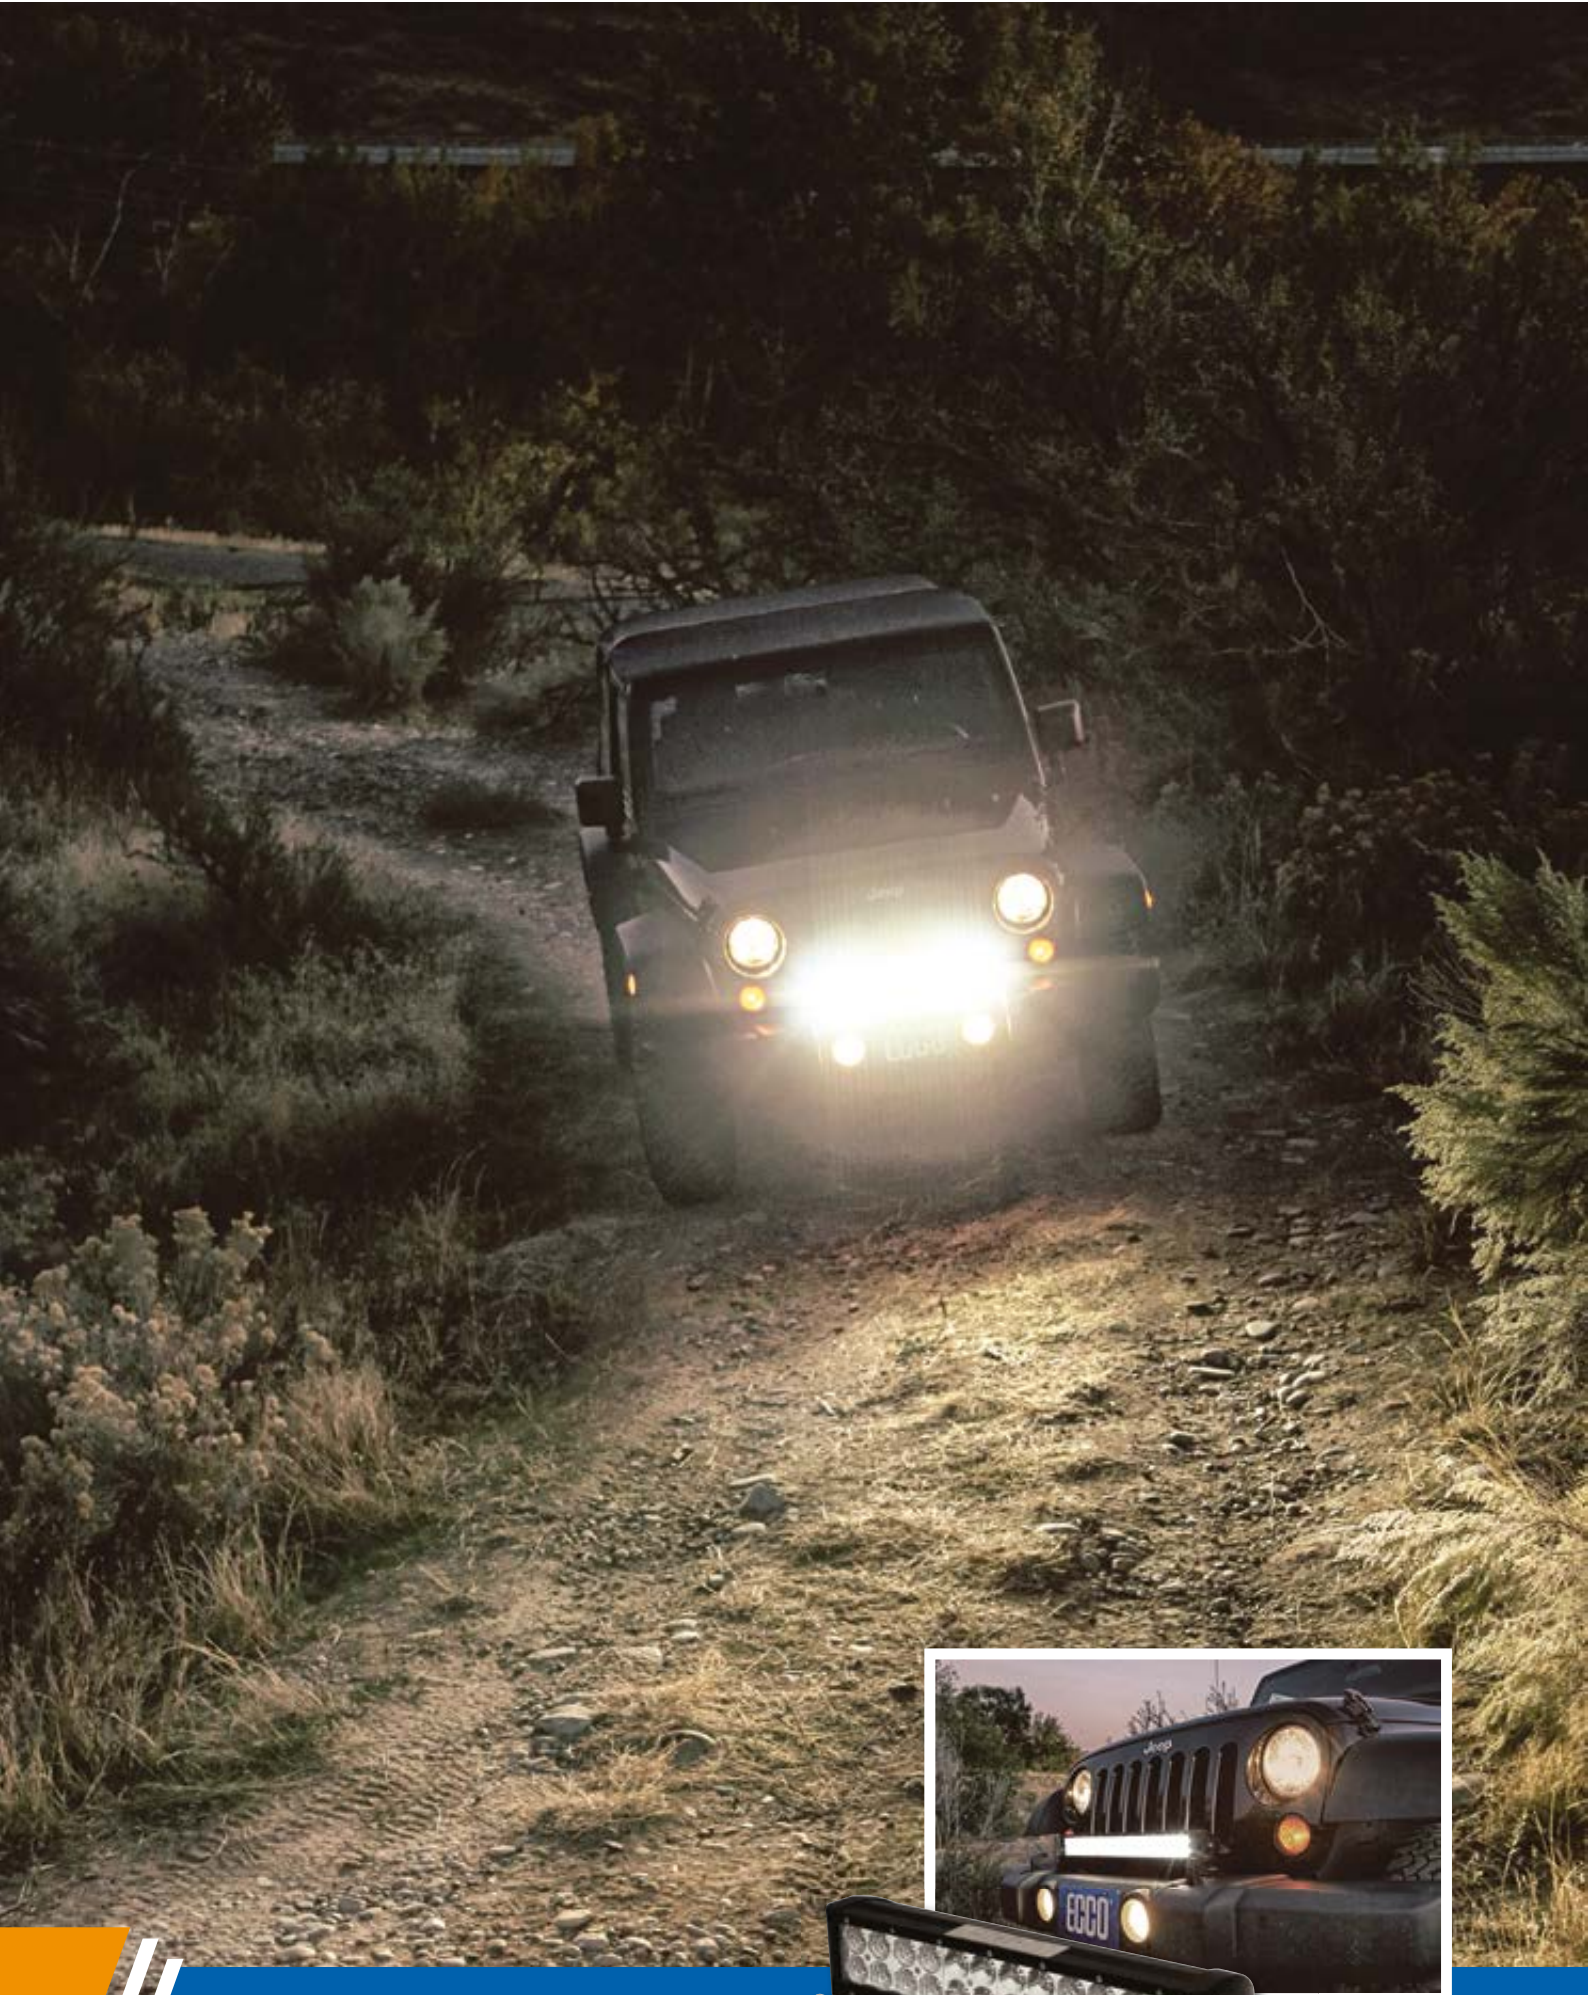

Utility bars

We should have named it the Super-Functional, Flexi-Mount, Multi-Width, Place-Anywhere Spot/Flood lightbar. With 16 different styles to choose from, one of these utility bars is certain to meet your needs. Install one (or more) on the front of your 4 x 4 or the rear of your recovery truck and light up the night.

utility bars

EW3108

8" Single Row Rectangular LED Bar

Six 5-watt LEDs

Tilting pedestal or tilting surface mount options

Aluminium heatsink housing

Polycarbonate lens



EW3108-F

V 12-24

A 1.9

L 1100 Raw, 1000 Effective

Flood

IP67, R10

3 Year

EW3108-S

12-24

1.9

1150 Raw, 1100 Effective

Spot

IP67, R10

3 Year

DIMENSIONS

51mm H x 193mm W x 84mm D

EW3208

8" Double Row Rectangular LED Bar

Twelve 5-watt LEDs

Tilting pedestal or tilting surface mount options

Aluminium heatsink housing

Polycarbonate lens



EW3208-F

V 12-24

A 3.8

L 2150 Raw, 1950 Effective

Flood

IP67, R10

3 Year

EW3208-S

12-24

3.8

2450 Raw, 2250 Effective

Spot

IP67, R10

3 Year

DIMENSIONS

76mm H x 203mm W x 84mm D



utility bars



EW3114

14" Single Row
Rectangular LED Bar

Twelve 5-watt LEDs
Tilting pedestal or tilting surface mount options
Aluminium heatsink housing
Polycarbonate lens

DIMENSIONS

51mm H x 356mm W x 84mm D

EW3114
V 12-24
A 5.7
L 3350 Raw, 2600 Effective
Flood / Spot Combo
R10
3 Year



EW3214

14" Double Row
Rectangular LED Bar

Twenty-four 5-watt LEDs
Tilting pedestal or tilting surface mount options
Aluminium heatsink housing
Polycarbonate lens

DIMENSIONS

76mm H x 363mm W x 84mm D

EW3214
V 12-24
A 9.3
L 6700 Raw, 4800 Effective
Flood / Spot Combo
R10
3 Year

utility bars



EW3124

24" Single Row
Rectangular LED Bar

Twenty-one 5-watt LEDs

Tilting pedestal or tilting surface mount options

Aluminium heatsink housing

Polycarbonate lens

DIMENSIONS

51mm H x 597mm W x 84mm D

EW3124

V 12-24

A 8.7

L 5900 Raw, 4400 Effective

Flood / Spot Combo

R10

3 Year



EW3225

25" Double Row
Rectangular LED Bar

Forty-four 5-watt LEDs

Tilting pedestal or tilting surface mount options

Aluminium heatsink housing

Polycarbonate lens

DIMENSIONS

76mm H x 635mm W x 84mm D

EW3225

V 12-24

A 17.3

L 12,300 Raw, 8800 Effective

Flood / Spot Combo

R10

3 Year



utility bars



EW3136

36" Single Row
Rectangular LED Bar

Thirty-three 5-watt LEDs
Tilting pedestal or tilting surface mount options
Aluminium heatsink housing
Polycarbonate lens

DIMENSIONS

51mm H x 922mm W x 84mm D

EW3136
V 12-24
A 13
L 9250 Raw, 6600 Effective
Flood / Spot Combo
R10
3 Year



EW3233

33" Double Row
Rectangular LED Bar

Sixty 5-watt LEDs
Tilting pedestal or tilting surface mount options
Aluminium heatsink housing
Polycarbonate lens

DIMENSIONS

76mm H x 851mm W x 84mm D

EW3233
V 12-24
A 25
L 16,800 Raw, 12,000 Effective
Flood / Spot Combo
R10
3 Year

utility bars



EW3149

49" Single Row
Rectangular LED Bar

- Forty-five 5-watt LEDs
- Tilting pedestal or tilting surface mount options
- Aluminium heatsink housing
- Polycarbonate lens

DIMENSIONS
51mm H x 1245mm W x 84mm D

- # EW3149
- V 12-24
- A 18.5
- L 12,600 Raw, 9000 Effective
- Flood / Spot Combo
- R10
- 3 Year



EW3242

42" Double Row
Rectangular LED Bar

- Seventy-six 5-watt LEDs
- Tilting pedestal or tilting surface mount options
- Aluminium heatsink housing
- Polycarbonate lens

DIMENSIONS
76mm H x 1067mm W x 84mm D

- # EW3242
- V 12-24
- A 32
- L 21,300 Raw, 15,200 Effective
- Flood / Spot Combo
- R10
- 3 Year

utility bars



EW3312

12" Single Row
Rectangular LED Bar

Six 10-watt LEDs

Tilting pedestal or tilting surface mount options

Aluminum heatsink housing

Polycarbonate lens

DIMENSIONS

76mm H x 356mm W x 102mm D



EW3312-F
V 12-24
A 4.3
L 3350 Raw, 2350 Effective
Flood
IP67, R10
3 Year



EW3312-S
12-24
4.3
2350 Raw, 1900 Effective
Spot
IP67, R10
3 Year



Added power for added output

The 10-watt versions of our new utility bars offer greater light output per inch from fewer LEDs. Each model features both tilting surface and pedestal mounting options, and our 3 year warranty.

utility bars



EW3324

24" Single Row
Rectangular LED Bar

Twelve 10-watt LEDs

Tilting pedestal or tilting surface mount options

Aluminium heatsink housing

Polycarbonate lens

DIMENSIONS

76mm H x 635mm W x 102mm D

EW3324

V 12-24

A 8.1

L 8400 Raw, 5400 Effective

Flood / Spot Combo

IP67, R10

3 Year



EW3336

36" Single Row
Rectangular LED Bar

Eighteen 10-watt LEDs

Tilting pedestal or tilting surface mount options

Aluminium heatsink housing

Polycarbonate lens

DIMENSIONS

76mm H x 940mm W x 102mm D

EW3336

V 12-24

A 12.7

L 12,600 Raw, 8100 Effective

Flood / Spot Combo

IP67, R10

3 Year

ASK FOR ECCO GET FREE TRUCKS

Get your hands on this set of limited-edition model vehicles in ECCO's biggest ever end-user promotion.

In many ECCO product boxes, you'll find a series of six leaflets that describes ECCO's main product categories, our industry-first mobile learning platform, our social media outlets, or facts about the company. On the back of each leaflet is a 'Claim Your Truck' panel.

Collect six leaflets and redeem them for a collectible die-cast model truck, absolutely free! Collect six sets of leaflets to get the whole fleet of model trucks!

Make no mistake, these aren't tiny toy trucks. These adult collectibles are 1:50 and 1:25 scale models, all in distinctive ECCO blue.



COLLECT THEM ALL

From left to right: On-highway dump truck, cement truck, off-highway dump truck, loading shovel, crane, forklift
Terms and conditions apply. Visit www.eccogroup.com/modeltruck for details.

We've got your back



Alarm selection made easy

The ECCO Mobile App makes back-up alarm selection quick and simple. Automatically generate a list of suitable products, either by vehicle application or by measuring ambient work site noise using the built-in decibel meter. Users can also access detailed product information, listen to sound samples and locate ECCO dealers – all from the office, fleet parking lot or construction site!



**Need to find an alarm?
There's an app for that.**

Scan the QR Code to learn how
or search ECCO Mobile in your app store



Android




Apple

back-up alarms



How Smart Alarms® adjust to the environment

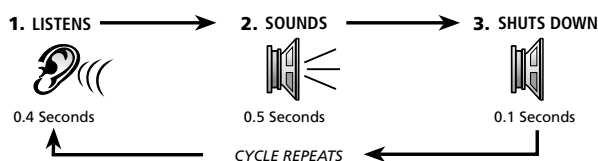

Smart Alarms self-adjust to their environment as they constantly measure ambient noise and adjust their sound level to 5 dB(A) above, creating a volume that is safe without being annoying or contributing to noise pollution. Pure Tone models feature the familiar beep-beep sound of a conventional back-up alarm while Multi-Frequency versions provide a solution to potential noise pollution created by conventional back-up alarms in confined or densely populated work areas. Multi-Frequency alarms maintain a safe warning signal for those in the danger zone of backing vehicles while minimising disturbance to work site neighbours by using a range of sound frequencies within a narrow band to emit a warning signal that is more directional and perceived to dissipate quicker than that of a pure tone alarm.



back-up alarms



950-001
V 12-24
dB(A) 82-102
A 0.4
T Lead wire, 1m
X 2 Bolt
CE, R10, UL, IP65
2 Year



SA950
12-24
82-102
0.4
Stud connector plus ground
2 Bolt
CE, R10, UL, IP65
2 Year



951-001
12-48
77-97
0.2
Lead wire, 1m
2 Bolt
CE, R10, UL
2 Year



SA951
12-48
77-97
0.2
Stud connector plus ground
2 Bolt
CE, R10, UL
2 Year



901N-001
V 12-24
dB(A) 82-107
A 0.3
T Lead wire, 450mm
X 2 Bolt
CE, R10, UL, IP64
ECCOLIFE™



931N-001
12-48
82-102
0.2
Lead wire, 450mm
2 Bolt
CE, R10, UL, IP64
ECCOLIFE™



917N-001
12-24
87-112
1.5
Lead wire, 450mm
2 Bolt
SAE J994 Type F, CE, R10
ECCOLIFE™



914N-001
12-24
87-112
1.5
Lead wire, 450mm
2 Bolt
SAE J994 Type F, CE, R10
ECCOLIFE™



SA920
V 12-24
dB(A) 97-112
A 0.6
T Stud connector
X 2 Bolt
CE, R10, IP66
2 Year



EA9070
12-24
87-107
0.9
Lead wire, 290mm
2 Bolt
SAE J994 Type F, CE, R10, IP66
ECCOLIFE™



EA9724
12-24
77-97
0.7
Lead wire, 450mm
2 Bolt
SAE J994 Type F, CE, R10
ECCOLIFE™



EA9780
36-80
77-97
0.8
Lead wire, 450mm
2 Bolt
SAE J994 Type F, CE, R10
ECCOLIFE™

MULTI-FREQUENCY

MULTI-FREQUENCY

MULTI-FREQUENCY

Want to hear the
multi-frequency sound?
Download the app.



Android



Apple

back-up alarms



Emits sound at multiple frequencies attenuated above 4000Hz
Compact design and universal mounting maximises location options
Encapsulated electronics extend product life
To listen to a sound sample, download the ECCO Mobile App
(see page 87)



Shhh-shhh is a newer sound that has been introduced as a warning signal.

The sound is perceived to be more directional.

The sound is perceived to dissipate more quickly outside the danger zone behind the vehicle.



back-up alarms

Multi-Frequency



EA5050
V 12-24
dB(A) 87
A 0.34
T Lead wire, 270mm
X 2 Bolt
SAE J994 Type D,
CE, R10, AMECA
2 Year



EA5200
V 12-24
dB(A) 97
A 1.0
T Lead wire, 270mm
X 2 Bolt
SAE J994 Type C,
CE, R10, AMECA
2 Year



EA5820
V 12-24
dB(A) 82
A 0.2
T Lead wire, 270mm
X 2 Bolt
SAE J994 Type F,
CE, R10
2 Year



EA5920
V 12-24
dB(A) 92
A 0.5
T Lead wire, 270mm
X 2 Bolt
SAE J994 Type F,
CE, R10
2 Year



EA6100
V 12-24
dB(A) 97
A 0.7
T Lead wire, 450mm
X 2 Bolt
SAE J994 Type C,
CE, R10
ECCOLIFE™



EA7020
V 12-24
dB(A) 102
A 0.6
T Lead wire, 290mm
X 2 Bolt
SAE J994 Type F, CE,
R10, AMECA, IP66
ECCOLIFE™



EA7070
V 12-24
dB(A) 107
A 0.8
T Lead wire, 290mm
X 2 Bolt
SAE J994 Type B, CE,
R10, AMECA, IP66
ECCOLIFE™



EA9070 
V 12-24
dB(A) 87-107
A 0.9
T Lead wire, 290mm
X 2 Bolt
SAE J994 Type F, CE,
R10, AMECA, IP66
ECCOLIFE™



EA9724 
V 12-24
dB(A) 77-97
A 0.7
T Lead wire, 450mm
X 2 Bolt
SAE J994 Type F,
CE, R10, AMECA
ECCOLIFE™



EA9780 
V 36-80
dB(A) 77-97
A 0.8
T Lead wire, 450mm
X 2 Bolt
SAE J994 Type F,
CE, R10
ECCOLIFE™

back-up alarms



Compact design and universal mounting maximizes location options
 Stud terminal connection (575 = leadwire)
 Self-grounding (except 575)
 Encapsulated electronics extend product life

*SRC – Self Resonating Circuitry monitors the frequency of the alarm's sound output on each cycle and adjusts to the optimum frequency for prevailing conditions. This feature maintains the most effective warning signal possible for the life of the alarm by compensating for speaker aging, temperature and humidity variations, as well as the effect of dust and moisture deposits.

*NC – Night Silent Alarm sound can be disabled during restricted hours either via switch or double engaging rear gear.

*NR – Night Reduction Alarm volume can be reduced during restricted hours via a switch.

DIMENSIONS

71mm H x 102mm W x 41mm D

500 Series

950-001 **SMART ALARM**
 V 12-24
 dB(A) 82-102
 A 0.4
 T Lead wire 1m
 X 2 Bolt
 CE, R10, UL, IP65
 2 Year

SA950 **SMART ALARM**
 12-24
 82-102
 0.4
 Stud connector plus ground
 2 Bolt
 CE, R10, UL, IP65
 2 Year

951-001 **SMART ALARM**
 V 12-48
 dB(A) 77-97
 A 0.2
 T Lead wire 1m
 X 2 Bolt
 CE, R10, UL
 2 Year

SA951 **SMART ALARM**
 12-48
 77-97
 0.2
 Stud connector plus ground
 2 Bolt
 CE, R10, UL
 2 Year

505-001
 V 12-24
 dB(A) 87
 A 0.1
 T *SRC,
 Lead wire 2m
 X 2 Bolt
 CE, e, UL, AMECA
 2 Year

505
 12-24
 87
 0.1
 *SRC,
 Stud connector plus ground
 2 Bolt
 CE, e, UL, AMECA
 2 Year

580-001
 V 12-80
 dB(A) 87
 A 0.1
 T *SRC,
 Lead wire 1m
 X 2 Bolt
 CE, e, UL,
 AMECA
 2 Year

580
 12-80
 87
 0.1
 *SRC,
 Stud connector plus ground
 2 Bolt
 SAE J994 Type D,
 CE, e, UL, AMECA
 2 Year

575-001
 V 12-24
 dB(A) 107
 A 0.9
 T Lead wire 1m
 X 2 Bolt
 SAE J994 Type B,
 CE, e, UL
 2 Year

500 Series

520-001

V 12-24
dB(A) 97
A 0.2
T *SRC,
 Lead wire 1m
X 2 Bolt
CE SAE J994 Type C, CE,
 e, UL, AMECA, IP65
🕒 2 Year

520

12-24
 97
 0.2
 *SRC, Stud connector
 plus ground
 2 Bolt
 SAE J994 Type C, CE,
 e, UL, AMECA, IP65
 2 Year

515-002

V 12-24
dB(A) 90-0
A 0.2
T *NC - Switched,
 Lead wire 300mm
X 2 Bolt
CE SAE J994 Type F, EMC
🕒 2 Year

515-003

12-24
 90-78
 0.1
 *NR - Switched,
 Lead wire 300mm
 2 Bolt
 SAE J994 Type F, EMC
 2 Year

585-001

V 12-48
dB(A) 97
A 0.1
T *SRC,
 Lead wire 1m
X 2 Bolt
CE CE, e, UL, AMECA
🕒 2 Year

585

12-48
 97
 0.1
 *SRC, Stud connector
 plus ground
 2 Bolt
 CE, e, UL, AMECA
 2 Year

515-004

V 12-24
dB(A) 90-0
A 0.2
T *NC - Double Engage,
 Lead wire 300mm
X 2 Bolt
CE SAE J994 Type F, EMC
🕒 2 Year

520-003

12-24
 97-87
 0.1
 *NR - Switched,
 Lead wire 300mm
 2 Bolt
 SAE J994 Type C & D
 2 Year

530-001

V 12-24
dB(A) 102
A 1.0
T *SRC,
 Lead wire 1m
X 2 Bolt
CE SAE J994 Type F,
 CE, e, UL, AMECA
🕒 2 Year

530

12-80
 102
 1.0
 *SRC, Stud connector
 plus ground
 2 Bolt
 SAE J994 Type F, CE,
 e, UL, IP65
 2 Year

520-004

V 12-24
dB(A) 97-0
A 0.2
T *NC - Double Engage,
 Lead wire 300mm
X 2 Bolt
CE SAE J994 Type C,
 EMC
🕒 2 Year

back-up alarms

600 Series



901N-001
V 12-24
dB(A) 82-107
A 0.3
T Lead wire, 450mm
X 2 Bolt
CE, R10, UL, IP64
ECCOLIFE™



931N-001
V 12-48
dB(A) 82-102
A 0.2
T Lead wire, 450mm
X 2 Bolt
CE, R10, UL, IP64
ECCOLIFE™



Reverse mounted speaker protects against dust, moisture and vibration

Designed for demanding applications

Encapsulated electronics extend product life

Life of the vehicle warranty

610N-001
V 12-36
dB(A) 97
A 0.4
T Lead wire, 450mm
X 2 Bolt
SAE J994 Type C, CE, e, UL, AMECA
ECCOLIFE™

630N-001
V 12-36
dB(A) 107
A 1.2
T Lead wire, 450mm
X 2 Bolt
SAE J994 Type B, CE, e, UL, AMECA
ECCOLIFE™

DIMENSIONS

78mm H x 127mm W x 68mm D

700 Series

OEM popular design

SA920 includes protective grille

Stud terminal connection

Encapsulated electronics extend product life



SA920
V 12-24
dB(A) 97-112
A 0.6
T Stud connector
X 2 Bolt
CE, R10, IP66
2 Year

777
V 12-24
dB(A) 97/107/112 Switchable
A 0.8
T Stud connector
X 2 Bolt
SAE J994 Type A, B, C, CE, e, IP66
2 Year



DIMENSIONS

84mm H x 181mm W x 102mm D

800 Series

Reverse mounted speaker protects against dust, moisture and vibration
Designed for demanding applications
Encapsulated electronics extend product life
Life of the vehicle warranty



#	917N-001	830N-001
V	12-24	12-36
dB(A)	87-112	107
A	1.5	1.3
T	Lead wire, 450mm	Lead wire, 450mm
X	2 Bolt	2 Bolt
⊗	SAE J994 Type F, CE, R10	SAE J994 Type B, CE, e, AMECA
⌚	ECCOLIFE™	ECCOLIFE™

#	850N-001
V	12-36
dB(A)	112
A	1.3
T	Lead wire, 450mm
X	2 Bolt
⊗	SAE J994 Type A, CE, e, UL, AMECA
⌚	ECCOLIFE™

DIMENSIONS

105mm H x 146mm W x 79mm D

As above, plus bracket including popular OEM mounting pattern



#	914N-001	876N-001
V	12-24	12-36
dB(A)	87-112	112
A	1.5	1.3
T	Lead wire, 450mm	Lead wire, 450mm
X	2 Bolt	2 Bolt
⊗	SAE J994 Type F, R10	SAE J994 Type A, CE, e, UL, AMECA
⌚	ECCOLIFE™	ECCOLIFE™

DIMENSIONS

105mm H x 180mm W x 78mm D



Audible Signal Devices

Panel mount 1.25" hole

Piezo electronics

Encapsulated electronics extend product life



201120
T Fast Pulse
V 12-48
dB(A) 80
A 0.1
 UL
 6 Month



202120
T Slow Pulse
V 12-48
dB(A) 80
A 0.1
 -
 6 Month

204120
T Dual Mode
V 12-48
dB(A) 80
A 0.1
 6 Month

208120
T Loud Continuous
V 12-36
dB(A) 86
A 0.1
 6 Month

209120-E
T Continuous
V 12-48
dB(A) 80
A 0.1
 UL
 6 Month

DIMENSIONS
 33mm H x 43mm Diameter
 45mm H including terminals

Warning Alarms



532-001
V 12-24
dB(A) 102
A 0.3
T Reverse/Dual Tone,
 Lead wire, 1m and stud
 connector plus ground
 2 Bolt
 SAE J994 Type F
 2 Year



590-001
V 12-24
dB(A) 102
A 0.5
T Constant Tone,
 Lead wire, 150mm
 2 Bolt
 CE, e, UL
 2 Year



591-001
V 12/24
dB(A) 97
A 0.5
T Dual Tone,
 Lead wire, 1m
 2 Bolt
 CE, e
 2 Year



FH575
V 12
dB(A) 107
A 0.5
T Forward Horn,
 Lead wire, 450mm with spade
 2 bolt
 SAE J1105 Type L, CE, R10, UL
 2 Year



No wire, no wasted time

Get the quality and functionality of wired systems with ECCO's EC5605-WK wireless reversing camera system. Stop wasting time hard-wiring camera systems, and start seeing clearly with our wireless cameras.

camera systems



EC5605-WK 5.6" LCD Colour Wireless System

- 2.4 GHz digital wireless system
- Touchscreen menu control
- Internal controller
- CMOS infrared 11 LED camera
- Includes monitor sunshade
- Four camera expandable
- One year warranty

GemineyeTM
WIRELESS CAMERA SYSTEM

Kit includes:

- Wireless monitor
- 1 wireless camera
- Power/connection loom



camera systems



GemineyeTM
WIRELESS CAMERA SYSTEM

EC5603-SVK 5.6" LCD Colour System

Touchscreen operation
3 camera capable kit
One year warranty

Kit includes:

Monitor
1 camera
20m extension lead
Power/connection loom



GemineyeTM
WIRELESS CAMERA SYSTEM

EC7003-SVK 7.0" LCD Colour System

Touchscreen operation
3 camera capable kit
One year warranty

Kit includes:

Monitor
1 camera
20m extension lead
Power/connection loom

camera systems



K7000B 7.0" LCD Colour System

CMOS 18 LED infrared camera
Includes monitor sunshade
Two camera expandable
One year warranty

GemineyeTM
WIRELESS CAMERA SYSTEM

Kit includes:

Monitor
1 camera
20m extension lead
Power/connection loom



140-550

5.0" 3 camera capable kit

Touch control monitor
3 camera capable kit
One year warranty

Kit includes:

Touch control monitor
1 camera
20m extension lead
Power/connection loom



140-750

7.0" 3 camera capable kit

Touch control monitor
3 camera capable kit
One year warranty

Kit includes:

Touch control monitor
1 camera
20m extension lead
Power/connection loom



camera systems



DAC1001

5.0" 4 camera capable kit

5.6" monitor

4 camera capable kit

One year warranty

Kit includes:

Monitor

1 camera

20m extension lead

Power/connection loom



DAC1002

7.0" 4 camera capable kit

5.6" monitor

4 camera capable kit

One year warranty

Kit includes:

Monitor

1 camera

20m extension lead

Power/connection loom



DAC1003

7.0" 4 camera capable kit

7.0" monitor

4 camera capable kit

One year warranty

Kit includes:

Monitor

1 camera

20m extension lead

Power/connection loom



DAC1021

7.0" 4 camera capable kit

7.0" monitor

4 camera capable kit

One year warranty

Kit includes:

Monitor

1 shutter camera

20m extension lead

Power/connection loom



camera systems monitors



EC5605-WM



M7000B



DAC1011

approvals	ECE R10, E13, FCC, CE RoHS, C-TICK	EMC, CE, RoHS	FCC, CE
internal controller	Yes	Yes	Yes
colour	Yes	Yes	Yes
voltage	12/24	12/24	12-32
power consumption (w)	5	5	25
audio	Yes	-	Yes
day / night light sensor	Yes	Yes	Yes
dimensions (H x W x D mm)	161 x 115 x 27	114 x 174 x 24	128 x 122 x 43
weight	2.87 lbs	0.88 lbs	3.9 lbs
temperature	-20° to +65°	-4° to +58°	-20° to +65°
screen size	5.6"	7.0"	7.0"
quad view	-	-	Yes
DVR compatible	-	-	-
mirror image	Yes	Yes	Yes
remote control	Yes	Yes	Yes
sunshade	Yes	Yes	Yes
weatherproof	-	-	-
max cameras	4	2	4
4 pin camera connection	Yes	Yes	Yes



camera systems monitors



**141-950
141-970**

EMC, R10 RoHS



DAC1026

EMC, CE, RoHS



**DAC1009
DAC1010**

EMC, R10 RoHS



DAC1025

IP69K, EMC, CE, RoHS

Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
12/24	9-16	12-24	10-32
5	3	6	5
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
107 x 156 x 32 (5.0" monitor) 139 x 225 x 34 (7.0" monitor)	91 x 30 x 280	107 x 156 x 32 (5.0" monitor) 139 x 225 x 34 (7.0" monitor)	154 x 225 x 34
2.8 lbs	1.1 lbs	3.7 lbs	4.07 lbs
-20° to +70°	-20° to +70°	-20° to +70°	-20° to +70°
5.0" 7.0"	4.3"	5.0" 7.0"	7.0"
-	-	-	Yes
-	-	-	-
-	-	Yes	Yes
-	-	Yes	Yes
Yes	-	Yes	Yes
-	-	-	IP69K
3	1	3	4
Yes	Yes	Yes	Yes

camera systems cameras



C2013B



DAC1004



DAC1005

approvals	IP69K, FCC, CE, RoHS	IP69K, FCC, CE, EMARK	IP69K, FCC, CE, EMARK
colour / black & white	Colour	Colour	Colour
power consumption (watts)	1	1	3
microphone	-	-	Yes
day / night light sensor	Yes	Yes	Yes
dimensions (H x W x D mm)	72 x 86.6 x 75.1	55 x 109 x 110	72 x 86.6 x 75.1
weight	0.61 lbs	0.81 lbs	1.71 lbs
temperature	-30°C - to +70°C	-20°C - to +70°C	-20°C - to +70°C
lens angle	120°	90°/120°	180°
lens size	1/4"	1/3"	1/3"
infrared LEDs	18	5	12
mechanical vibration	8g	6.5g	-
4 pin camera connection	Yes	Yes	Yes
5 pin camera connection	-	-	-



DAC1024



EC2014-SVC



EC2014-WC

approvals	IP69K, EMC	R10, FCC, CE, RoHS	IP69K, EMC, R10, FCC, CE, RoHS
colour/black & white	Colour	Colour	Colour
power consumption (watts)	1.5	3	2.5
microphone	-	Yes	Yes
day / night light sensor	Yes	Yes	Yes
dimensions (H x W x D mm)	48 x 57 x 52.2	55 x 78 x 45	55 x 78 x 45
weight	0.37	0.89	0.89
temperature	-20°C - to +70°C	-20°C - to +70°C	-20°C - to +70°C
lens angle	120°	120°	120°
lens size	1/3"	1/3"	1/3"
infrared LEDs	6	11	11
mechanical vibration	10g	10g	10g
4 pin camera connection	Yes	Yes	-
6 pin camera connection	-	-	-



camera systems cameras



DAC1006

IP69K, R10, RoHS

Colour

3

Yes

Yes

72 x 86.6 x 75.1

1.1 lbs

-20°C - to +70°C

180°

1/3"

18

10g

Yes

-



DAC1007

IP69K, FCC, CE, RoHS

Colour

1

-

-

72 x 86.6 x 75.1

0.2 lbs

-20°C - to +70°C

120°

1/3"

-

10g

Yes

-



DAC1008

FCC, CE, EMARK

Colour

1

-

-

120 x 120 x 95

0.14kg

-20°C - to +70°C

120°

1/3"

18

10g

Yes

-



DAC1023

IP69K, EMC

Colour

3

-

Yes

87 x 115.5 x 65

1.7 lbs

-20°C - to +70°C

180°

1/3"

18

10g

-

Yes



142-050

IP69K, R10

colour

3

Yes

Yes

72 x 86.6 x 75.1

1.1 lbs

-20°C - to +70°C

120°

1/3"

18

10g

Yes

-



142-051

IP69K

colour

3

-

Yes

40 x 52 x 55

1 lb

-20°C - to +70°C

120°

1/3"

6

10g

Yes

-



142-052

IP69K, R10

colour

3

-

Yes

72 x 86.6 x 75.1

1 lb

-20°C - to +70°C

120°

1/3"

6

10g

Yes

-

LED compartment lighting



LED Compartment Light

EW9001
 V 12/24
 A 0.08
 W 3 x 0.4
 ✓ EMC

DIMENSIONS
 Height: 25mm
 Width: 129.6mm



LED Compartment Light

EW9002
 V 12/24
 A 0.17
 W 6 x 0.4
 ✓ EMC

DIMENSIONS
 Height: 25mm
 Width: 230.1mm



LED Compartment Light

EW9003
 V 12/24
 A 0.28
 W 12 x 0.4
 ✓ EMC

DIMENSIONS
 Height: 25mm
 Width: 431.1mm



LED Internal Cab Light

EW9000
 V 12/24
 A 0.28
 W 12 x 0.4
 ✓ EMC

DIMENSIONS
 Depth: 68.8mm
 Width: 386.3mm



LED Internal Cab Light

EW9004
 V 12/24
 A 0.56
 W 24 x 0.4
 ✓ EMC

DIMENSIONS
 Depth: 47.8mm
 Width: 400.9mm



LED Internal Cab Light

EW9005
 V 12/24
 A 0.56
 W 3 x 0.4
 ✓ EMC

DIMENSIONS
 Depth: 69.6mm
 Width: 400.6mm

PLEASE NOTE:

all products featured on this page are for internal use only.

sirens and speakers

Premium Siren Amplifier

Voice record / Playback

Wail, yelp and hi-lo tones, user selectable

Public address – volume control and microphone

8 x lighting control relays – user configurable

Over voltage, over temperature and polarity protected

One year warranty

Can be configured for Airhorn or phaser tones

60 Watt or 100 Watt output

Softstart siren

Radio re-broadcast

Manual wail

Siren Amplifier Kit 1000 Series

	Full Kit (includes all components listed right)	Amp	SLIC control pad	Loom	Microphone
V 12V	385-026	385-028	385-030	385-031	385-032
V 24V	385-027	385-029	385-030	385-031	385-032



CS200 Series Sirens



CS201 
CS202 

12 or 24V versions available


Up to 200 Watts output

Siren/tone scroll, air horn, cancel

CS202 adds 3 warning level buttons, manual siren, radio re-broadcast, lighting control button, customer specific tones available on request

One year warranty

Bumper Speaker



385.033

100W

Speaker 128dB under bumper

One year warranty

Flat Speaker



385.034

Flat Speaker

For up to 100W siren amp

One year warranty

100W Speaker



385.010

11 Ω nominal impedance

One year warranty

accessories Beacons

Beacon Lenses



400 Series Rotator

910.323 - Amber
910.321 - Blue
910.322 - Cal Blue
910.325 - Green
910.324 - Red



500 Series Rotator

910.151 - Amber
910.154 - Blue
910.152 - Cal Blue
910.155 - Green
910.153 - Red
910.156 - Amber ECE R65



400 Series Xenon

910.138 - Amber
910.284 - Blue ECE R65
910.462 - Cal Blue
910.134 - Green
910.133 - Red
910.131 - Amber ECE R65



400 Series LED

910.138 - Amber
910.284 - Blue ECE R65
910.462 - Cal Blue
910.134 - Green
910.133 - Red
910.131 - Amber ECE R65



500 Series Xenon

910.151 - Amber
910.154 - Blue
910.152 - Cal Blue
910.155 - Green
910.153 - Red
910.156 - Amber ECE R65



Mini Vision

910.085 - Amber
910.086 - Blue
910.087 - Green
910.088 - Red



Static Flash 400 Series

910.138 - Amber



Static Flash 500 Series

910.151 - Amber



7900 Series

910.396 - Amber
910.397 - Blue ECE R65
910.398 - Green
910.399 - Red



RB Lens Kit

Alpha/Beta/Delta/Durastrobe/
Gamma/Husky/HuskyPup
517002 - Amber
517053 - Blue
517005 - Green
517052 - Red
517001 - Clear



Turbo Lens Kit

Turbo Star
517026 - Amber
517027 - Blue
517025 - Green
517023 - Red
517021 - Clear



Solar Lens Kit

Solar Star
517010 - Amber
517011 - Blue



Lunar Lens Kit

Lunar Star
517122 - Amber
517124 - Blue

PLEASE NOTE:

other colours available on request.



accessories Beacons

Other Beacon Accessories



950.488 - Bulb
12V, 55W
Used with 400 Series and 500 Series beacons



950.466 - Bulb
24V, 70W
Used with 400 Series and 500 Series beacons



RPK999.556 - Module
Used with 400 Series Rotator beacons



RPK999.555 - Module
Used with 500 Series Rotator beacons



R6200FT - Tube
Used with Mini Vision beacons



999.223 - Tube
Used with 400 Series, 500 Series and Special Purpose Xenon beacons



960.055 - Tube
ECE R65
Used with 400 Series and Special Purpose Xenon beacons



950.290 - Bulb
24V
Used with 400 Series and 500 Series Static Flash beacons



950.382 - Bulb
12V
Used with 400 Series and 500 Series Static Flash beacons



6410FT - Tube
Used with Mini Vision beacons



ADPTK01 - Adaptor plate
Used with other beacons



521036
Mag Kit/Cable/Cigar DIN Plug
Used with Alpha, Beta, Delta and Husky



521022
Triple Mag Kit
Used with Lunar, Solar and Turbo



521015
Single Bolt Kit
Used with Alpha, Beta, Delta, Lunar and Husky



52109
Single Bolt Kit
Used with Solar and Turbo



521024
Pole Mount Kit
Used with Alpha, Beta, Delta, Lunar, Solar, Turbo and Husky



521048
Flexible Pole Mount Kit
Used with Alpha, Beta, Delta, Lunar, Solar and Turbo



521018
Mounting Bracket
Used with Alpha, Beta, Delta, Lunar, Solar, Turbo and Husky



521027
Backing Plate
Used with Alpha, Beta, Delta, Solar and Turbo



521033
Protector Guard
Used with Alpha, Beta, Delta and Husky



521053
Protector Guard
Used with Lunar



521021
Protector Guard
Used with Solar and Turbo

PLEASE NOTE:

other spares may be available on request.

accessories CCTV & Worklamps

CCTV Accessories



DAC1012 - Monitor Power / Camera Loom
13 pin



DAC1013 - Monitor Power / Camera Loom
22 pin



143-006 - Susie Cable Kit
Susie extension kit with adaptors to fit all monitors and cameras



DAC1014 - Monitor Mounting Bracket
Centre mount monitor bracket, self adhesive and flexible for various mounting

SINGLE CAMERA CABLE EXTENSIONS



DAC1015
10m 4 pin cable extension
Used for standard cameras



DAC1016
20m 4 pin cable extension
Used for standard cameras



DAC1017
10m 5 pin cable extension
Used for shutter cameras



DAC1018
20m 5 pin cable extension
Used for shutter cameras

ADAPTOR LEADS



147-005
5 pin to 4 pin adaptor Converts shutter camera input to a standard input



147-101
Each kit contains 2 adaptors for adding cameras or monitors where different connections may be used



147-102
Each kit contains 2 adaptors for adding cameras or monitors where different connections may be used

Worklamp Mounting Foot



170.027 - Magnetic Mounting Foot
To fit all worklamps with single bolt bracket mount.
For static use only

accessories PSUs, Flasher Units and Switch Packs

PSUs and Flasher Units



100.093
Quantum PSU
10 - 30V, 50W
4 Output Xenon Power Supply
Heads selectable in pairs
8 Flash Patterns
Hi-Lo Intensity



999.107
Alternating Flasher Unit
12/24V
70 Watts per channel (max)
Insulated Earth Return required



100.311
Quantum PSU
10 - 30V, 60W
4 Output Xenon Power Supply
Selectable Double/ Quad Flash
Hi-Lo Intensity
Epoxy filled
Weather proof connectors



100.304
Double PSU
10 - 30V, 30W
2 Output Xenon Power Supply
Selectable Double/Quad Flash
Hi-Lo Intensity
Epoxy filled
Weather proof connectors

Switch Packs



200.041
2 Way Switch Pack
12V
10 Amps max per switch @ 12V



200.051
4 Way Switch Pack
12V
10 Amps max per switch @ 12V



200.052
4 Way Switch Pack
24V
5 Amps max per switch @ 24V



100.333
Keyless Running System
12V
System which allows the vehicle engine to continue running after the ignition key is removed.
With anti-theft stalling feature.



100.334
Keyless Running System
24V
System which allows the vehicle engine to continue running after the ignition key is removed.
With anti-theft stalling feature.



67601500
Triple Power Socket
with Universal Plug 16A,
Connection possible to all cigarette lighter sockets and DIN standard sockets.
12-24V, 16A max. with three sockets.
Internal Ø: 21mm
Cable: 2 x 1.5mm² flat cable.
Length: 2.0m

accessories Switches

Switches



200.008
Battery Isolator Switch - 100A
100 Amp 24V
(500 Amp for 5 seconds)
Complete with removable key



100.049
Waterproof Switch
Waterproof push On/Off



200.009
Push/pull Switch - Red
10 Amp @ 12V illuminated switch
push/pull, plastic shaft



200.010
Push/pull Switch - Green
10 Amp @ 12V illuminated switch
push/pull, plastic shaft



200.014
Push/pull Switch - Amber
10 Amp @ 12V illuminated switch
push/pull, plastic shaft



200.020
Toggle Switch
20 Amp @ 12V
Toggle On/Off, Chrome



200.023
Illuminated Switch
10 Amp @ 12V with interchangeable
lens Red, Green, & Amber, dual voltage,
supplied with 12V bulb, push/pull



67746000
Bendable Universal Plug with Switch
8A/12-24V, with single-pole circuit
breaker 8A, rocker switch imprinted
with 0-I. The plug is bendable up to
180°, with screwed terminals, adaptor
that can be firmly positioned by a
bayonet catch, fitting for cigarette
lighter and standard sockets.

Plugs and Sockets



67713000
Universal Plug
8A 12-24V plug
with maze-like strain relief



67713010
Universal Plug
16A 12-24V plug
with maze-like strain relief



67711010
Universal Plug
16A 12-24V plug
with screwed strain relief



67714000
Safety Universal Plug
8A 12-24V Safety plug
with maze-like strain relief



Fused

Plugs and Sockets



67712000
Safety Universal Plug
8A 12-24V Safety plug
with screwed strain relief



67712100
Safety Universal Plug
8A 12-24V Safety plug
with screwed strain relief
and LED



57725002
Standard Plug
8A 12-24V Standard DIN Plug
With soldered contacts



58078300
Standard DIN Plug
12A 12-24V Standard DIN Plug
With screw terminals and strain relief



57607000
DIN Socket
16A 12-24V DIN Socket
Requires Ø 18mm opening



57612002
Triple DIN Socket
16A 12-24V Triple DIN Socket
34mm x 94mm



57607002
DIN Socket & Dust Cap
16A 12/24V DIN Plug with dust and
splash proof cap
Dust and splash proof socket
Requires Ø 18mm opening



53114320
Metal DIN Socket 16A
16A 12/24V Metal DIN Socket
with spring loaded cap
With spring loaded protective cap
Requires Ø 18mm opening



52005000
Waterproof DIN Socket
8A 12-24V
IP67 Rated
Screw cap
300mm cable



57608002
Set-on Socket Outlet
with Protective Cap
16A 12-24V Surface Mount Socket and
cap Dust/Splash-proof cap
6.3mm flat terminals



68040860
Power Socket to SAE Standard
20A Socket Outlet with protective cap
Requires 27.8mm opening
Fixing by clip mounting



67834000
Universal Plug with Flat Cable
8A Flat cable with
fused Safety Universal Plug
With 4.0m flat cable



67837000
Universal Plug with Helix Cable
8A 12/24V Helix cable with Universal
Plug
With 0.6m - 3.0m Helix cable



67814100
Safety Universal Plug Extension Cable
- Helix
8A 12-24V Safety Universal Plug
Extension cable - flat
With 4.0m flat cable



67818100
Safety Universal Plug Extension Cable
- Helix
8A 12-24V Safety Universal Plug
Extension cable - Helix
With 0.6m - 3.0m Helix cable



67879000
Twin Socket Connector
Connection is possible in all sockets for
cigarette lighters, two large sockets
(interior Ø 21mm), 12-24V, 2 x 8A max.
Integrated interchangeable 16A fuse. 2
x 0,75mm² flat cable, length 0.25 m.



67311000
USB Built-in Socket
12V DC / 5V DC
1000mA

accessories Fixing Kits

Fixing Kits



999.547
1 Bolt Beacon Kit




999.568
Blaze Bar Kit



999.569
Lightbar Kit
Fits most roofbar sizes



905.011
Pair of stainless steel 150mm
high lift feet



905.010
Pair of stainless steel 100mm
high lift feet



100.056
Pole Mount Bracket
Straight fixing bracket for DIN pole
mount products with integral single
contact socket



100.057
Pole Mount Bracket
Welded fixing bracket for DIN pole
mount products with integral single
contact socket



100.058
Pole Mount Bracket
Screw fixing bracket for DIN pole
mount products with integral single
contact socket




100.059
Pole Mount Bracket
Side fixing bracket for DIN pole mount
products with integral single contact
socket



100.074
Pole Mount Bracket
Fold down fixing bracket for DIN pole
mount products with integral single
contact socket





Download digital copy

Worldwide leader in
commercial and emergency
vehicle warning and safety products

www.eccosafetygroup.com

Distributed by:



Victoria Industrial Park, Victoria Road, Seacroft, Leeds, LS14 2LA, UK
+44 (0)113 237 5340 | europe@eccogroup.com | www.eccosafetygroup.com

A Division of ESG | www.eccosafetygroup.com

997.080